

How To Process LADCP/CTD Data For Vertical Velocity and Finescale Vertical Kinetic Energy (LADCP_w Software V1.2beta5)

A.M. Thurnherr
athurnherr@yahoo.com

March 17, 2016

5

Contents

1	Introduction	2
	1.1 Preliminaries	2
	1.2 Software Requirements and Installation	3
10	1.3 Vertical-Velocity Processing Overview	3
	1.4 Input/Output Data	4
2	Calculating Vertical Package Velocity (LADCP_w_CTD)	4
3	Calculating Vertical Ocean Velocity (LADCP_w_ocean)	6
	3.1 Synopsis	6
15	3.2 Processing Configuration File (ProcessingParams)	7
	3.3 Processing Output Files	8
4	Data Editing and Post-processing	11
	4.1 Measurement Errors	11
	4.2 Combining Data from Dual-Head LADCP Systems (LADCP_w_postproc)	13
20	4.3 Manual Data Editing (LADCP_w_postproc)	15
5	Calculating Finescale VKE and ϵ_{VKE} (LADCP_VKE)	15
	5.1 Quantifying Vertical Kinetic Energy from Vertical-Velocity Profiles	15
	5.2 Calculating p_0 and ϵ_{VKE} with LADCP_VKE	16
	5.3 Quality Control and Interpretation of LADCP-Derived VKE and ϵ_{VKE}	17
25	A Alternative CSV File Format For CTD Data	19
B	Common Data Problems	20
	B.1 Dropped CTD Scans	20
	B.2 Insufficient Sampling & Profile Gaps	21
	B.3 Package-Wake Effects	22

30	B.4 Vertically Moving Organisms	22
	B.5 Boundary Effects	24
	B.6 Strong Turbulence	24

1 Introduction

1.1 Preliminaries

35 This manual is intended as a “cookbook,” describing how to derive profiles of vertical velocity from data collected with standard LADCP/CTD systems, using processing software available at <http://www.ldeo.columbia.edu/LADCP>. *No special instrument setup is required for acquiring LADCP data suitable for vertical-velocity processing. In particular, vertical velocities can be calculated from archived LADCP data, as long as pressure time series of adequate temporal resolution and quality*
 40 *are available.* The software is a fairly complex implementation of a simple method that consists in subtracting vertical package velocity (w_{CTD}), derived from CTD pressure time series, from the ADCP-derived vertical velocity measurements (w_{ADCP}), before binning the resulting ocean velocities ($w_{ocean} = w_{ADCP} - w_{CTD}$) in depth (Thurnherr, 2011). The processing software is implemented in the perl programming language and has been tested on UN*X systems, including MacOSX, FreeBSD
 45 and Linux. All source files use tab stops every 4 columns; for correct formatting use, e.g. `less -x4` or an editor where the tab separation can be changed.

Processing LADCP data for vertical ocean velocity is conceptually much simpler than horizontal-velocity processing (Firing and Gordon, 1990; Fischer and Visbeck, 1993a; Visbeck, 2002). While the unknown horizontal CTD-package velocity required to obtain ocean velocity from the relative
 50 measurements must be inferred from external constraints in case of horizontal velocity, the vertical package velocity w_{CTD} is known at all times. This has several important consequences:

1. The vertical velocities at a given depth derived from the downlooker and from the uplooker are entirely independent, as they do not use any common data. (The two instrument sample the same depth at different times.) Differences between uplooker and downlooker-derived w_{ocean}
 55 data therefore provide a quantitative metric of measurement uncertainty.
2. Profiles with gaps, e.g. due to insufficient acoustic scattering at depth, can be processed without any particular difficulties.
3. Because of the random-walk error accumulation, instrument range is the most important parameter affecting the quality of horizontal LADCP velocities (Firing and Gordon, 1990; Visbeck, 2002; Thurnherr, 2010). For vertical velocities, random error (but not bias) can be reduced
 60 by decreasing the vertical resolution of the binned profiles during post-processing. This allows calculation of w_{ocean} in some regions where the acoustic backscatter is too weak (instrument range too short) for horizontal-velocity processing.

There are additional important differences between processing LADCP data for horizontal and vertical
 65 velocities:

1. Horizontal ocean velocities are mostly dominated by processes with timescales that are long compared to typical LADCP/CTD cast durations. As a result, down- and upcast data are usually combined to yield cast-time averaged profiles. In contrast, vertical velocities are mostly dominated by internal waves near the buoyancy frequency (e.g. Thurnherr et al., 2014), i.e.
 70 with time scales that are not long compared to typical CTD/LADCP sampling time scales. As a result, down- and upcast w_{ocean} data must be processed separately, yielding two profiles from each cast.

2. Good heading (compass) data are required for horizontal-velocity LADCP processing. LADCP data collected near the magnetic poles, in particular, cannot be processed for horizontal velocity. In contrast, heading data are not used at all for w_{ocean} LADCP processing, i.e. data from the magnetic poles or from instruments with bad compasses can be processed for vertical velocity.

1.2 Software Requirements and Installation

The processing software for vertical LADCP velocities is implemented in the `perl` programming language, which is pre-installed on most UN*X systems. Diagnostic plots are produced with the **Generic Mapping Tools (GMT)**, a set of UN*X tools to produce Postscript plots from ASCII input files. The following software is required to process LADCP/CTD data for vertical velocity:

Generic Mapping Tools (GMT) GMT must be installed and the GMT binary directory must be included in the search path of the shell.¹ GMT version 5 is required.

ANTSLib This library, available at www.ldeo.columbia.edu/LADCP, provides a general data processing and I/O framework. The installation directory must be added to the shell's search path.

ADCP_tools This tool kit provides additional required libraries, as well as a number of ADCP utilities, e.g. for splitting ADCP files from tow-yos and yo-yos into individual casts. The ADCP Tools are available at www.ldeo.columbia.edu/LADCP. The installation directory must be added to the shell's search path.

LADCP_w The vertical-velocity processing software is implemented as several separate command-line utilities. It is available at www.ldeo.columbia.edu/LADCP. The installation directory must be added to the shell's search path.

Once all required software has been installed, the installation can be tested by running

```
LADCP_w_ocean -V
```

from any directory. If any of the prerequisites are missing (or if the path is not set correctly) an error message is produced. If the installation is complete, a short version and copyright message is produced instead. Running `LADCP_w_ocean` or any other of the utilities described below without command-line arguments produces a usage message describing the command-line options and -arguments.

1.3 Vertical-Velocity Processing Overview

Vertical-velocity processing is carried out in several consecutive steps, which are implemented as separate command-line utilities to allow selective re-processing:

1. *Calculate vertical package velocity w_{CTD} with the `LADCP_w_CTD` utility.* Input: 24 Hz CTD time series. Output: 6 Hz time series of pre-processed CTD data, including low-pass w_{CTD} , as well as diagnostic plots. For details, see Section 2 below.
2. *Calculate vertical ocean velocity w_{ocean} with the `LADCP_w_ocean` utility.* Input: 1) 6 Hz time series of pre-processed CTD data. 2) RDI data file (PD0 format). Output: Edited (quality-controlled) vertical velocities, diagnostic data, as well as diagnostic plots. For details, see Section 3 below.

¹Familiarity with basic UN*X shell concepts is assumed in this manual.

110 3. *Post-process w_{ocean} with the LADCP_w_postproc utility.* This utility carries out arbitrary data editing (removing bad measurements) and creates vertically gridded profiles from the edited w_{ocean} data. Data from uplooker and downlooker ADCPs from dual-headed LADCP systems can be combined into a single profile. Input: One or two LADCP_w_ocean output files, and a file with data-editing parameters. Output: Fully processed w_{ocean} profile. For details, see
115 Section 4.3 below.

For processing, every profile must be assigned a unique *profile id* (usually numerical), which is used to construct file names and to select profile-specific processing parameters. Often, it makes sense to use the CTD station number as the *profile id*. In addition to the *profile id*, every processed profile is additionally associated with a *run label*, which can be any character string. This allows multiple
120 processing runs for a single profile.

1.4 Input/Output Data

ADCP Input Data. Binary data in the Teledyne/RDI PD0 format are accepted as input. Supported instrument types include NB150, BB150, WH150, WH300, WH600, WH1200, and the Explorer DVL.

125 **CTD Input Data.** Either binary or ASCII 24 Hz CNV time-series files from SBE911plus systems are accepted as input. Alternatively, the CTD data can be supplied in a simple ASCII CSV format (Appendix A). In case of SBE CNV files, the header must include the latitude of the station, and the file must contain pressure (`prDM`), *in situ* temperature (`t090c` and/or `t190c`) and conductivity (`c0S/m` or `c0mS/cm` and/or `c1S/m` or `c1mS/cm`) fields. If the CTD file contains
130 a header field called `station`, the content of this field is taken as the default *profile id*.

Output Data. All output files use a whitespace-delimited ASCII file format called the ANTS format. The “#” character is used for comments and metadata header lines; the string `nan` is used to indicate missing values. ANTS files can easily be read by many software packages, possibly after manually removing the headers. The file layout (association of field names with
135 data columns) is defined by the last header line beginning with `#ANTS#FIELDS#`. Header lines beginning with `#ANTS#PARAMS#` define meta-data parameters. In order to load an ANTS file, including metadata, into `Matlab` the routine `loadANTS.m`, which is available as part of the `Matlab_tools` software (available at www.ldeo.columbia.edu/LADCP) can be used.

Diagnostic plots. All plots produced by the processing software are in Postscript (ps) format with
140 loose bounding boxes (standard GMT output).

2 Calculating Vertical Package Velocity (LADCP_w_CTD)

In a first processing step, 24 Hz CTD time-series data are pre-processed with the LADCP_w_CTD utility to derive cleaned 6 Hz time series of depth, sound speed, vertical package velocity, and temperature. The vertical package velocity is low-pass filtered to remove measurement noise; based on tests carried
145 out with an early version of the processing software, a default low-frequency cut-off of 2 s is used.² Additionally, the minimum observed pressure is subtracted from all pressure measurements to ensure non-negativity.

²The low-pass cutoff can be modified with a command-line option to LADCP_w_CTD.

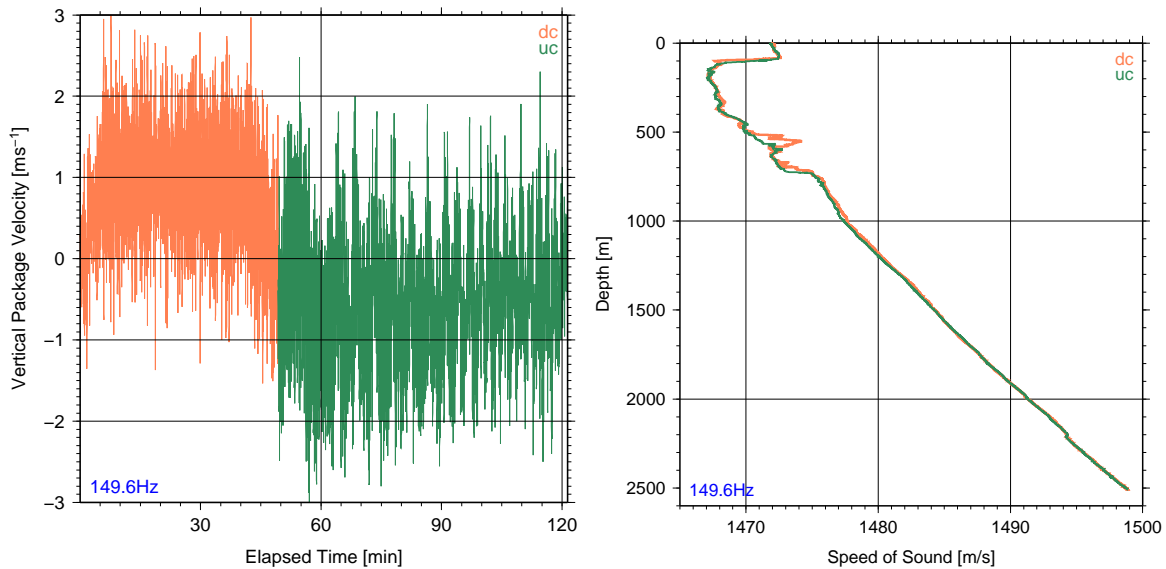


Figure 1: Example plots of output of `LADCP_w_CTD` from DIMES US2 station 149 in Drake Passage (Software V1.1). Left panel: Time series of vertical package velocity. Right panel: Sound speed profile.

`LADCP_w_CTD` takes the name of the CTD file as an argument and, often,³ a profile id supplied with the `-i` command-line option. The preferred input formats of CTD files are SBE CNV binary and ASCII files (HEX CNV files are not supported at present). If CNV files are not available the CTD time series data can also be supplied in a simple ASCII CSV format (Appendix A). By default, `LADCP_w_CTD` only displays error messages. In order to see progress, use `-v 1`; for diagnostic output use `-v 2`. For example, the command

```
LADCP_w_CTD -i 8 -v 2 oc46802008.cnv
```

processes the data in the file `oc46802008.cnv` with diagnostic output on screen, and produces the following three output files:

`008.6Hz` Time-series of CTD measurements (pressure, temperature, conductivity), and derived quantities (depth, salinity, sound speed, vertical package velocity).

`008_wpkg.ps` Diagnostic plot of of vertical package velocity time series (e.g. Figure 1, left panel).

`008_sspd.ps` Diagnostic plot of sound speed profile (e.g. Figure 1, right panel).

The user must ensure that the CTD time series used for vertical-velocity processing are free from significant glitches. Therefore, all diagnostic plots produced by `LADCP_w_CTD` should be inspected. (Figure 1 shows examples from a station occupied in Drake Passage on a fairly rough day for reference.) Pressure spikes, in particular, introduce package-velocity anomalies that typically cause the time-lagging algorithm used to merge the CTD with the ADCP data (Section 3) to fail. Other errors in the CTD data often do not cause processing to fail, but they increase the vertical-velocity errors and the erroneous data should, therefore, be removed. Profiles for which the automatic data

³For CTD files with the correct profile id in the `station` header field, `-i` is not required.

editing implemented in `LADCP_w_CTD` is insufficient must be pre-cleaned by replacing bad values in the input file with `nan` strings. *No scans must be removed from the CNV files that serve as input to*
170 *LADCP_w_CTD.*

Data transmission errors between the SBE 911plus underwater unit and the deck box cause CTD scans to be dropped, resulting in fewer than 24 CTD scans per second. As the SBE deck-box ignores this issue when time-stamping the data — it simply increases the elapsed time by 1/24s for each received scan — the SBE timestamps are not used for w_{ocean} processing. While the modulo-count
175 field in the SBE data can be used to determine where there are missing scans, I have not found a way to re-construct how many scans have been dropped from the recorded data. Therefore, profiles affected by significant transmission problems, e.g. due to dirty slip rings on a winch, can usually not be processed for vertical velocity. Profiles where the CTD data acquisition is restarted during the cast can usually also not be processed, either.

180 3 Calculating Vertical Ocean Velocity (`LADCP_w_ocean`)

3.1 Synopsis

In a second processing step the `LADCP_w_ocean` utility is used to calculate w_{ocean} from combined LADCP and CTD data. As input, `LADCP_w_ocean` requires a pre-processed CTD time series (Section 2) as well as a binary ADCP file. (The up- and downlooker data from dual-head LADCP systems
185 are processed separately, but the data can easily be combined during post-processing; Section 4.3.) `LADCP_w_ocean` requires one or two command-line arguments:

profile-id This argument is mandatory and usually numeric. It is used to select the CTD and ADCP input files, set profile-specific processing parameters, and to create output file names.

run-label This argument is optional and can be any string. It is used to distinguish different
190 processing runs for the same profile. For example, for dual-head LADCP systems the run labels DL and UL can be used for processing downlooker and uplooker data, respectively. If no run label is specified the label `default` is assumed. Each run label has its own associated output subdirectory, using the label as its name. The output directory must be created before processing.

195 It is not possible to specify input or output files for `LADCP_w_ocean` on the command line. Rather, **profile-id** and **run-label** are used to define the input and output filenames in the processing-configuration file (Section 3.2), which is also used to set the many configurable parameters controlling different aspects of processing. Some of the processing parameters can alternatively be set with command-line options, including the following:

200 **Screen verbosity (-v).** `LADCP_w_ocean` produces log output both on screen and in a log file. The `-v` option is used to set the verbosity level (0-3) for the screen output only, with `-v 0` producing only error messages, `-v 1` also including warnings (L0-2, with L2 being the most severe), `-v 2` producing a substantial amount of diagnostic output, and `-v 3` listing everything, including debugging messages. Default screen verbosity level is 1, and the log files always contain level 2
205 output.

Time lagging (-i, -n, -w). Accurate time lagging is crucially important for obtaining good vertical ocean velocities. The time-lagging algorithm involves three steps: i) An initial estimate is made based on the time when each profile reaches 10% of its maximum depth; this algorithm can be overridden by using the `-i` option. ii) A coarse-resolution time lag is calculated from

210 1 Hz CTD data. iii) A fine-resolution time lag is calculated using the full-resolution (6 Hz) CTD data. For steps ii and iii, the data are split into windows, controlled with the `-n` and `-w` options.

Setting water depth (-h). Knowledge of the water depth is important for editing measurements affected by previous-ping interference (PPI) and sidelobe contamination from the seabed. While the water depth is usually detected correctly by downlooking ADCPs, it has to be supplied manually for processing uplooker⁴ data. The easiest way to do this is to specify the water depth with the `-h` command-line option to `LADCP_w_ocean`. Either a numerical value (water depth in meters) or the name of the corresponding downlooker `w_ocean` profile, which contains the water depth as meta data, can be provided as an option argument.

3.2 Processing Configuration File (ProcessingParams)

220 There are numerous parameters controlling many processing details. A complete list, including documentation, can be found in the file `defaults.pl` in the installation directory. The default parameter values are suitable for data sets collected with 300 kHz Workhorse instruments (WH300) with 8 m bin size; for different bin sizes and/or instruments some of the parameters likely need to be changed. The file `defaults.pl` should never be modified, however. Rather, non-default processing-parameter values should be set in a processing configuration file. The configuration file is read *after* processing the command-line options, i.e. definitions in the configuration file take precedence over command-line options.⁵ There are several possible filenames for the configuration file. Given the run label DL, the following filenames are tried in order: `ProcessingParams.DL`, `ProcessingParams.default`, `ProcessingParams`. The first file that is found, is used. When `LADCP_w_ocean` is executed without a run label, only the latter two names are tried.

The processing configuration files are `perl` scripts. When they are executed, the current profile id and run label are stored in the variables `$PROF` and `$RUN`, respectively, allowing profile- and run-specific parameters to be selected with `if`-statements. While all processing parameters have suitable defaults, at the very least the LADCP and CTD input file names must be defined in the variables `$LADCP_file` and `$CTD_file`. The following example code assumes that the LADCP and CTD data for profile 13 can be found in the files `./LADCP/013DL000.000` and `./CTD/013.5Hz`, respectively:

```
$LADCP_file = sprintf("LADCP/%03dDL000.000", $PROF);
$CTD_file = sprintf("CTD/%03d.5Hz", $PROF);
```

240 If the CTD and/or LADCP input files use inconsistent numbering, a simple lookup table can be implemented, for example, as follows:

```
if (($PROF == 1) && ($RUN eq "DL")) {
    $LADCP_file = "LADCP/003DL000.000";
    $CTD_file = "CTD/002.5Hz";
} elsif (($PROF == 2) && ($RUN eq "DL")) {
245    $LADCP_file = "LADCP/002DL000.000";
    $CTD_file = "CTD/003.5Hz";
} else {
    die("cannot determine input files for profile $PROF run $RUN");
}
```

⁴Even LADCP data from upward-looking instruments can be severely degraded by sidelobe contamination from the seabed!

⁵The only exception to this rule is that any expression supplied with the `-x` command-line option is executed after the configuration file has been processed.

250 noting that the perl operators = and eq check for numerical and lexical (string) equality, respectively. Of course, it is also possible to add profile-specific processing parameters to the same if-statement.

3.3 Processing Output Files

LADCP_w_ocean creates several output files, all in a subdirectory that uses the run label as its name. (If no run label is specified on the command line, the label default is used in the ProcessingParams file, but the output directory is called profiles.) If the output directory does not exist it is created. Assuming that the downlooker data from profile 13 have been processed successfully with the command

```
LADCP_w_ocean 13 DL
```

the following data files are created:

260 DL/013.log Processing log output at verbosity level 2.

DL/013.wprof Gridded vertical velocity profiles from downcast; most fields are prefixed with dc_, uc_ or BT_, indicating downcast, upcast and bottom-track data, respectively. For each depth bin, the following quantities are recorded: nominal depth (bin center), nominal height-above-bottom, mean depth and elapsed time of all contributing samples (_depth and _elapsed, respectively); bin-medians of 2-beam vertical velocities (_w12 and _w34); bin-median of 3- or 4-beam vertical velocity (_w), mean-absolute-deviation from the 3-/4-beam median (_w.mad), as well as the number of samples per bin (_w.nsamp). (The 2-beam vertical velocities are primarily useful for diagnosing package-wake effects and bad beams.)

DL/013.wsamp Individual vertical velocity measurements (one record per bin for each ensemble). For each sample, the following information is recorded: ADCP ensemble number (ensemble), ADCP bin number (bin), elapsed time in seconds (elapsed), depth of measurement (depth), CTD depth (CTD_depth), downcast flag (downcast), 3-/4-beam vertical velocity (w), two separate 2-beam vertical velocities (w12 and w34), gridding residual of the 3-/4-beam solutions (residual), vertical package velocity (CTD_w), time derivative of vertical package acceleration (CTD_w_tt), measured vertical velocity (LADCP_w), error velocity (errvel), correlation (correlation), echo amplitude (echo_amplitude), volume scattering coefficient (Sv) calculated with the method of Deines (1999) with an additional empirical correction for remaining bin-dependent biases, package attitude (pitch, roll, tilt and heading), 3-beam flag (3_beam), and sound speed (svel).

280 DL/013.tis Time series of ADCP records (one record per ensemble) with merged CTD information: ensemble number (ensemble), elapsed time in seconds (elapsed), downcast flag (downcast), CTD depth (depth), sound speed at the transducer (xducer_sound_speed), package attitude (pitch, gimbal_pitch, roll, tilt and heading), vertical package velocity (CTD_w), time derivative of vertical package acceleration (CTD_w_tt), LADCP reference-layer vertical velocity (LADCP_refl_r_w and LADCP_refl_r_w.sig), and reference-layer ocean w (reflr_ocean_w).

In addition to those data files, a number of diagnostic plots are created. Figs. 2–7 show representative examples from high-quality profiles with both weak (left panels) and strong (right panels) vertical-velocity signals.

DL/013.wprof.ps Downcast-, upcast- and bottom-tracked vertical velocity profiles, as well as gridding statistics (Figure 2). For data recorded in beam coordinates, the two 2-beam vertical

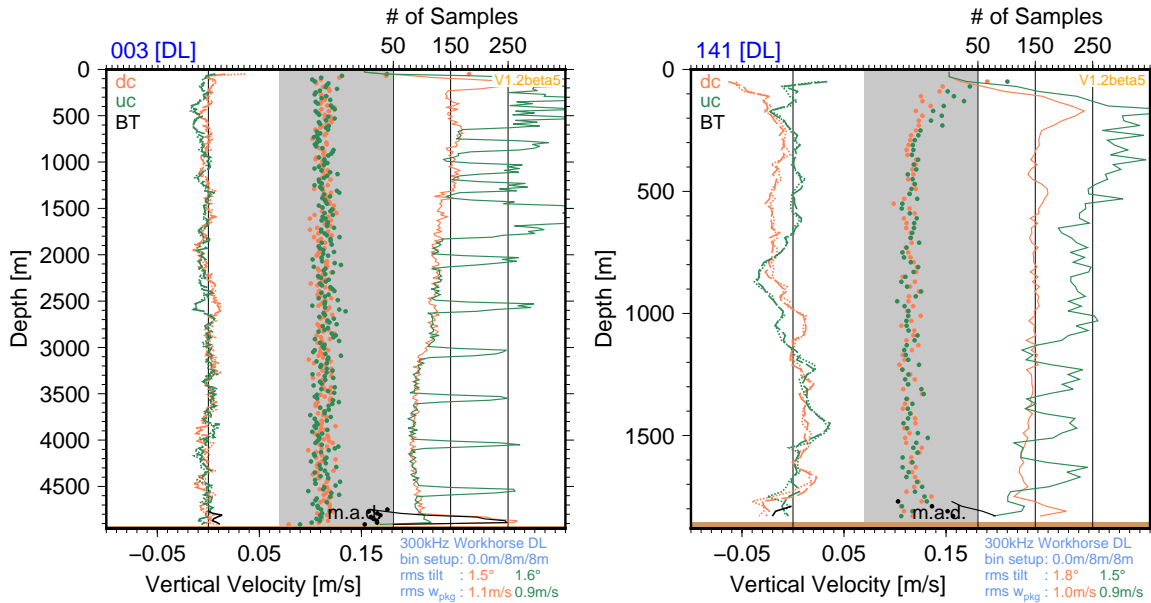


Figure 2: Example `_wprof.ps` diagnostic plots from DIMES US2 cruise with weak (left panel) and strong (right panel) vertical velocities; software version is indicated in the upper-right corner of the figure panels; colors are used to distinguish between downcast (dc, green), upcast (uc, orange) and bottom-track (BT, black) data. Blue labels above the figure panels give `profile-id` and `run-label`. Summary information printed below the panel on the right includes instrument type and orientation, bin setup (blanking distance, pulse length and bin length), as well as *rms* tilt and vertical package velocity observed during the cast. Each plot shows three types of data: i) 2-Beam vertical ocean velocity (median in each depth bin) plotted with dashed (w_{12}) and dotted (w_{34}) lines on the left and using the lower axis. ii) Corresponding mean-absolute-deviations (m.a.d.) plotted with bullets and also using the lower axis. iii) Corresponding number of samples plotted with solid lines on the right, using the upper axis.

295 velocities from both the up- and downcast are plotted separately with dashed and dotted lines, respectively. For data recorded in Earth coordinates, only a single solution is shown (e.g. upper right panel of Figure 11 in Appendix B). Summary information printed below the figure panel on the right includes instrument type and orientation, bin setup (blanking distance, pulse length and bin length), as well as *rms* tilt and vertical package velocity observed during the cast. In addition to providing a summary of the data, this figure is useful for diagnosing package-wake effects and bad beams.

300 DL/013_mean_residuals.ps Profiles of mean residuals vs. distance from the ADCP transducer (bin number; Figure 3). Next to the profile summary plot, this is the most useful plot for diagnosing data problems. In particular, the residuals should be small and associated with little vertical structure. For both down- and upcast *rms* values of the mean-residuals in a block of high-quality ADCP bins (indicated by the orange and green lines in the profiles) are printed inside the figure panels over a background of green, yellow or red, indicating progressively worse data quality. In profiles with large vertical velocities, comparatively larger residuals can be tolerated than in more quiescent regions.

305

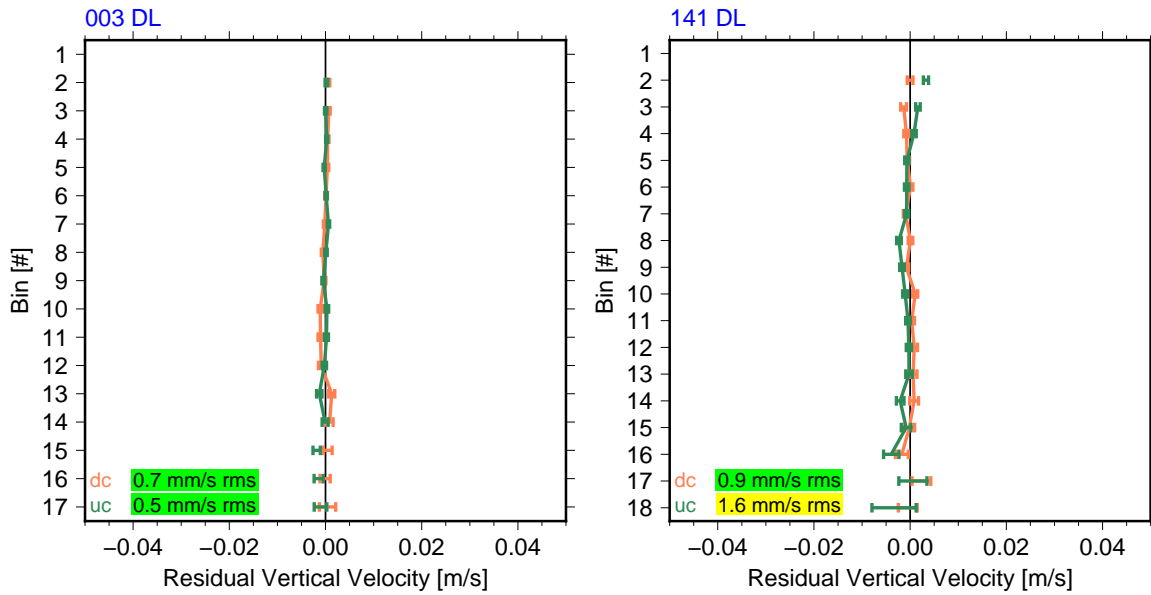


Figure 3: Example `_mean_residuals.ps` diagnostic plots for the two profiles of Figure 2; software V1.2. Each panel shows the mean residuals (with standard deviations) plotted against bin number (distance from ADCP transducer). The dc and uc labels printed inside the panel list downcast and upcast *rms* mean residuals in the block of bins with the best data (solid orange and green lines in the profiles); green, yellow and red background colors indicate data of progressively less quality.

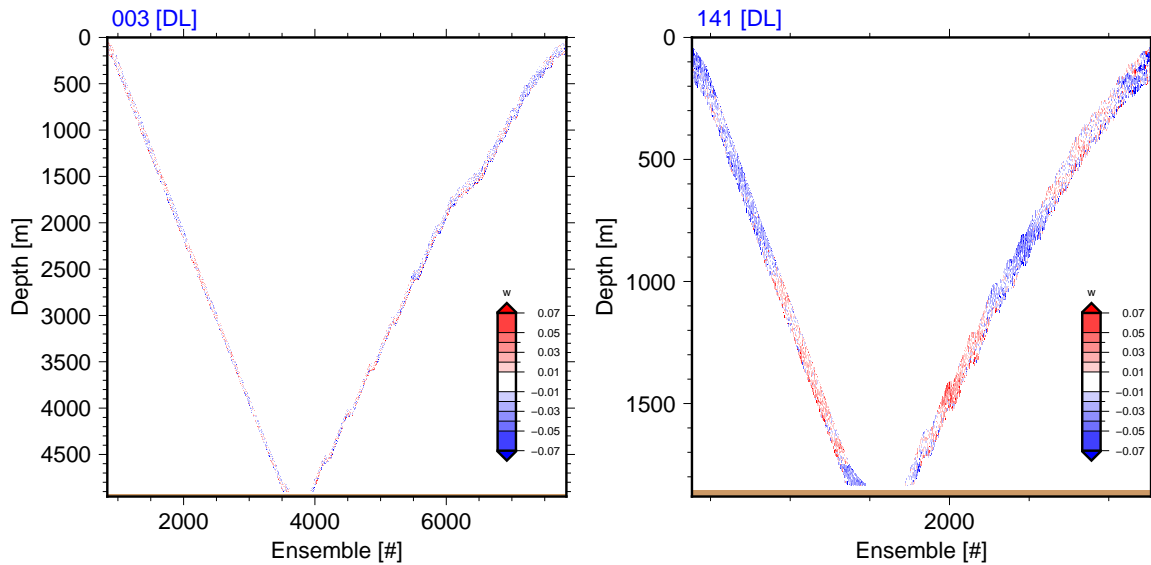


Figure 4: Example `_wsamp.ps` diagnostic plots for the two profiles of Figure 2; software V1.2. Each panel shows all ocean-velocity samples in time-depth space.

DL/013_wsamp.ps Time-depth plot of vertical ocean velocity (Figure 4). This plot is useful for diagnosing measurement artifacts, especially in comparatively shallow profiles.

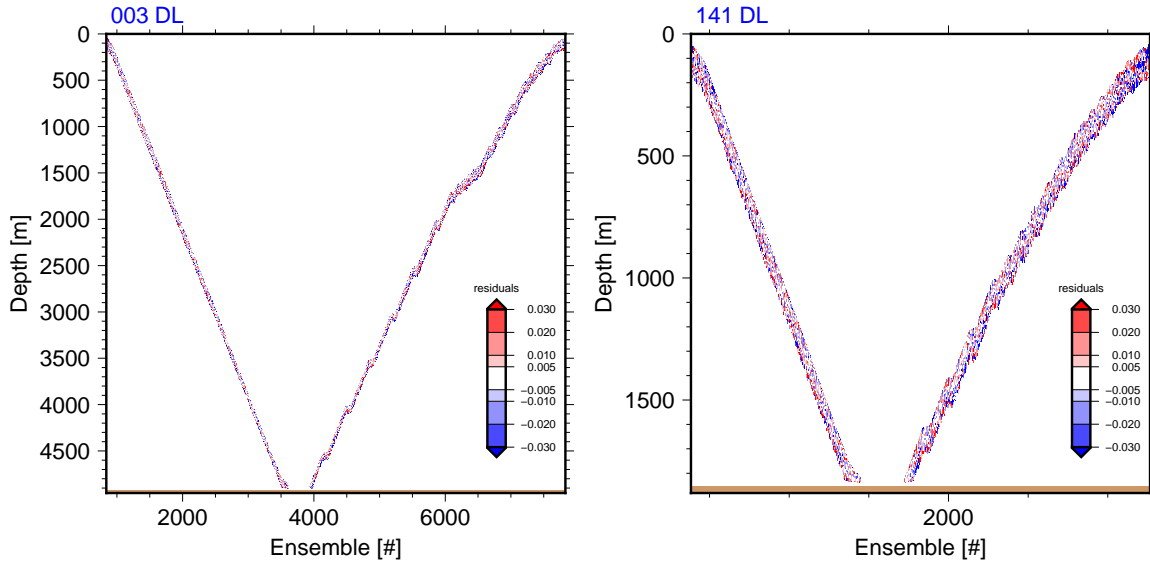


Figure 5: Example `_residuals.ps` diagnostic plots for the two profiles of Figure 2; software V1.2. Each panel shows all ocean-velocity residuals (differences between the individual measurements and the binned medians in the corresponding depth bins) in time-depth space.

DL/013_residuals.ps Time-depth plot of vertical velocity gridding residuals (Figure 5). This plot, too, is primarily useful for diagnosing measurement artifacts.

DL/013_backscatter.ps Time-depth plot of acoustic volume-scattering coefficients (Figure 6). This plot is primarily useful for determining whether particular w signals could be biological artifacts (e.g. due to vertical plankton migration) or related to strong turbulence. After applying the correction of *Deines* (1999), the S_v values in each ADCP bin are corrected for remaining depth- and bin-dependent biases using *in situ* data. While this correction ensures horizontal banding in the S_v plots, there remain apparently instrument-dependent biases of up to 5 dB, which must be removed manually before combining the acoustic backscatter data from upward- and downward-looking ADCPs. At present, calculation of S_v only works correctly for 300 kHz Workhorse ADCPs.

DL/013_time_lags.ps Time series of lag-correlation offsets used to merge the LADCP to the CTD data (Figure 7). This plot is useful to verify that time-lagging was performing as intended and to diagnose dropped CTD scans (Section B.1).

4 Data Editing and Post-processing

4.1 Measurement Errors

Every processed w_{ocean} profile is contaminated by measurement errors that can include random noise, down-/upcast biases, winch-acceleration anomalies, as well as “glitches” caused by bad measurements

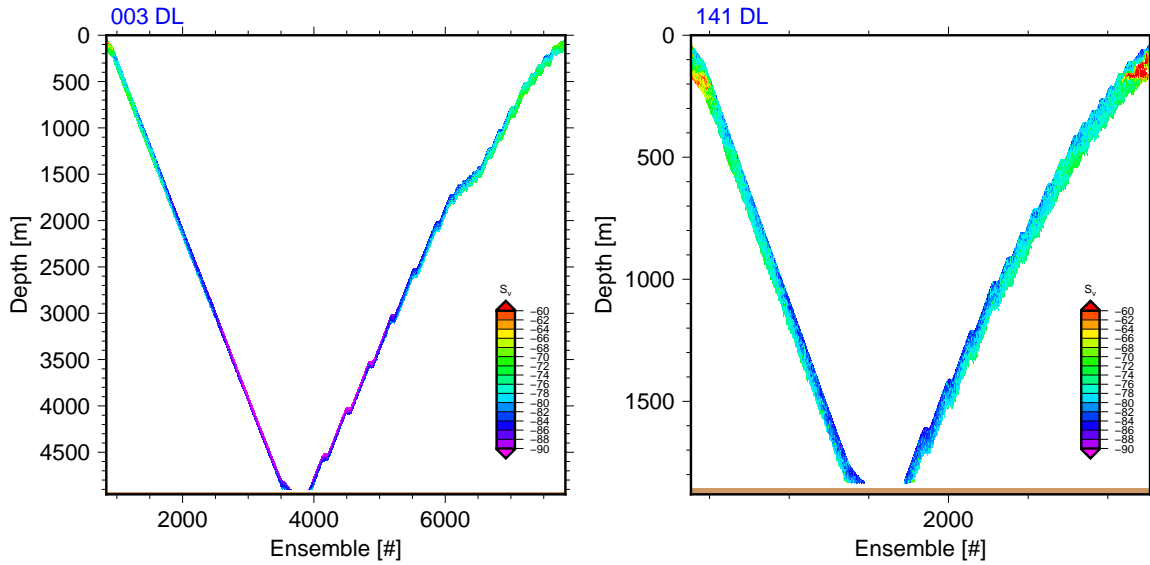


Figure 6: Example `_backscatter.ps` diagnostic plots for the two profiles of Figure 2; software V1.2. Each panel shows all acoustic volume scattering coefficients (S_v) in time-depth space.

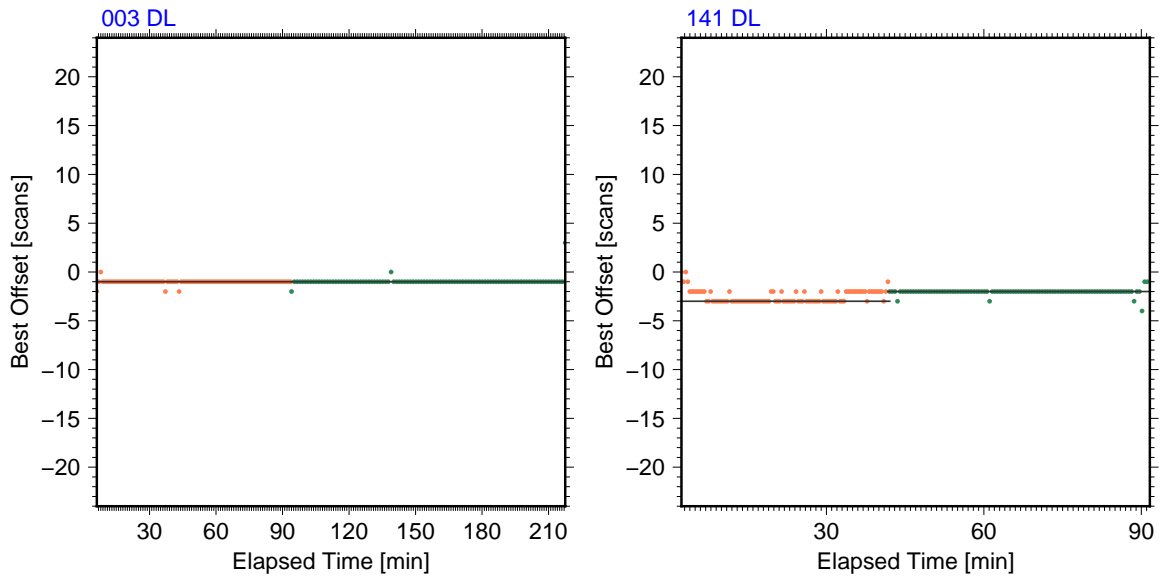


Figure 7: Example `_time_lags.ps` diagnostic plots for the two profiles of Figure 2; software V1.2. Each panel shows a time series of the lags required for optimal matching of the CTD to the ADCP data. Orange/green indicate downcast/upcast data.

that are not removed by the automatic data editing. While isolated bad measurements can be removed with the `LADCP_w_postproc` utility (Section 4.3) other errors, such as down-/upcast biases, are more difficult to deal with. As discussed below, the errors of vertical velocity profiles collected with dual-

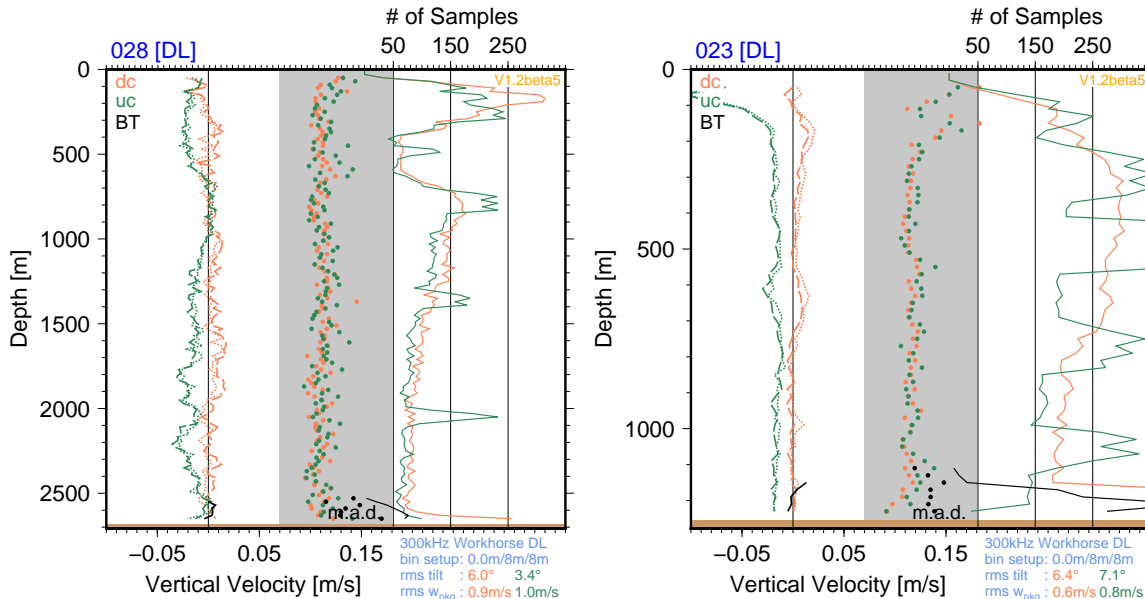


Figure 8: Example `wprof` plots from two data sets associated with apparent downcast-/upcast vertical velocity biases. Left panel: East Pacific Rise crest; upcast velocities (green) are $1\text{--}3\text{ cm}\cdot\text{s}^{-1}$ too low, with reduced bias during long bottle stops. Right panel: Gulf of Mexico; upcast velocities are $\approx 2.5\text{ cm}\cdot\text{s}^{-1}$ too low throughout the profile.

head systems can easily be quantified.

330 Apart from discrepancies between the two individual 2-beam solutions (which is equivalent to large error velocities⁶) the most common indicator for problems with the vertical-velocity data are consistent differences (biases) between downcast and upcast profiles (Figure 8). Often, the upcast velocities are more biased than the downcast velocities. While, sometimes, the biases are approximately uniform throughout the water column (right figure panel), more often the biases are reduced during bottle stops (left panel), i.e. there can be significant vertical structure in the vertical-velocity errors of upcasts in particular. Depth-dependent errors are difficult to deal with in general. In case of the data set from the East Pacific Rise (example profile in left panel) vertical-wavenumber spectra of w_{ocean} indicate that vertical wavelengths shorter than $\approx 150\text{ m}$ in this data set are significantly degraded by measurement errors and should not be used (Thurnherr *et al.*, 2015). In case of the data set from the Gulf of Mexico (example profile in right panel), one might restrict the analysis to downcast profiles only or, alternatively, an empirically determined bias could be subtracted from each upcast profile. (Depth-independent biases do not affect calculation of finescale VKE.)

4.2 Combining Data from Dual-Head LADCP Systems (`LADCP_w_postproc`)

345 For w_{ocean} LADCP data collected with dual-head systems, measurement errors can easily be quantified as the UL and DL profiles are independent samples of the oceanic velocity field. Statistical independence results from the non-overlapping (in time) sampling of any depth layer by the two instruments. With typical winch speeds of 50–60 meter per minute the two ADCPs sample the same

⁶*Error velocity* is one of the diagnostic variables returned by RDI ADCPs. Error velocity is proportional to the difference between the two independent 2-beam measurements for w .

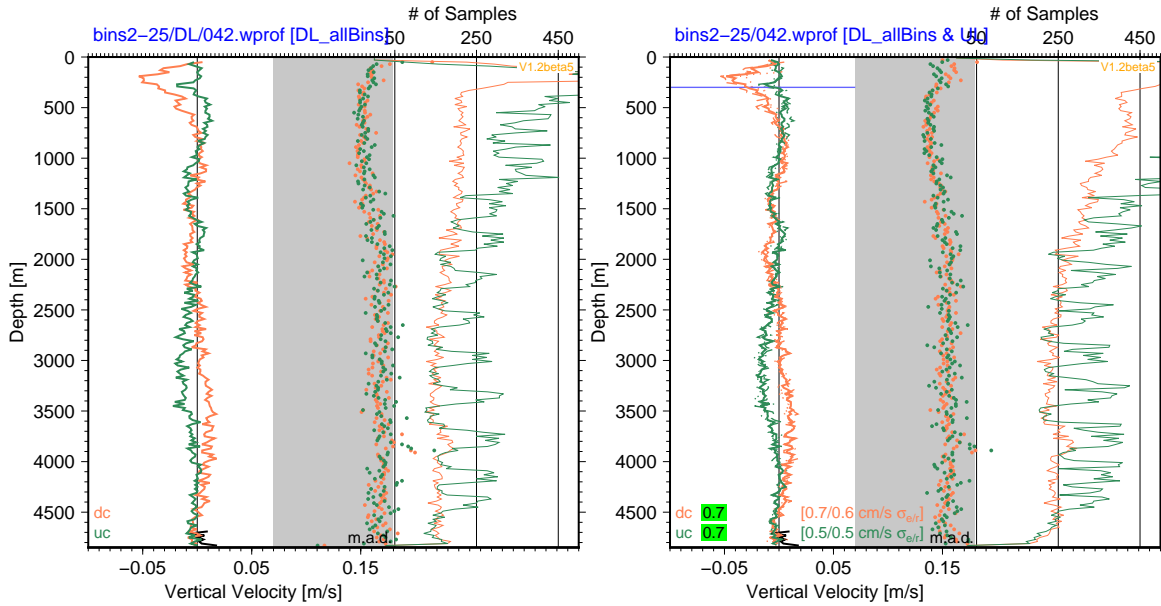


Figure 9: Example `_wprof.ps` diagnostic plots produced by `LADCP_w_postproc` showing a profile from the western tropical Pacific (2015 GO-SHIP P16N profile 120). Left panel: Using only the downlooker `.wsamp` input file. Right panel: Using both `.wsamp` input files (dual-head LADCP system); labels inside figure panel show results from DL/UL correlation below a near-surface layer (horizontal blue line); in addition to the correlation coefficients (on green, yellow or red backgrounds), the explained and residual standard deviations are given in square brackets.

depth layer $\approx 2-3$ min apart, which is short compared to typical buoyancy periods and yet much longer than the time scales associated with surface-wave related vessel heave, which dominates the instantaneous w measurements almost everywhere.⁷ As a result, correlation between DL and UL vertical-velocities is calculated as a simple quantitative indicator of profile quality when UL and DL data are combined with the `LADCP_w_postproc` utility. `LADCP_w_postproc` takes the DL and UL `.wsamp` files as input and creates a single profile and two diagnostic plots. For example, the command

```
LADCP_w_postproc DL/120.wsamp UL/120.wsamp
```

combines the measurements from `DL/120.wsamp` and `UL/120.wsamp` to create a combined w_{ocean} profile (`120.wprof`), as well as two diagnostic plots (`120_wprof.ps` Figure 9; `120_wcorr.ps`). The profile output from `LADCP_w_postproc` is similar to the the `.wprof` output from `LADCP_w_ocean`, except that there are no bottom-track and 2-beam solutions. The figure has the same layout as the `_wprof` diagnostic plots produced by `LADCP_w_ocean` (Figure 2); when two input files are used, the individual profiles are plotted with thin dashed and dotted lines, and the combined profile is plotted with heavy solid lines (right figure panel). In order to plot the BT solution as well, a downlooker profile can be supplied with the `-b` command-line option (`-b DL/120.wprof` in the example). The labels inside the figure panel show results from DL/UL correlation below a near-surface layer, indicated by the

⁷In contrast to w , LADCP-derived horizontal velocities require data from the entire profile to constrain the flow at a particular depth.

horizontal blue line. The most important diagnostic are the correlation coefficients, which are printed on green, yellow or red background, depending on the quality of the correlation. The explained and residual standard deviations are printed in square brackets to the right of the median profiles.

Figure 9 illustrates clearly how much harder it is to carry out QC with profiles derived from single instruments. Visually, there are no indications whether the apparent signals are real or measurement artifacts in the left panel, whereas the right panel clearly confirms the signals' reality. Consistent with this visual assessment, the DL/UL vertical velocities are highly correlated, in spite of the overall weakness of the signal. For vertical-velocity data collected with a single ADCP, where no UL/DL correlations can be calculated, an apparently universal k_z^{-2} power-law dependence of finescale vertical-wavenumber (k_z) VKE spectra (*Thurnherr et al., 2015*) is useful, as it allows determination of both short-wavelength cutoff and instrument noise level at that wavelength.

4.3 Manual Data Editing (LADCP_w_postproc)

In addition to combining the data from dual-head LADCP systems (Section 4.2) `LADCP_w_postproc` also provides a mechanism for manual editing of bad data. In many cases the bad data to be removed can be found quite easily by inspecting the diagnostic plots produced during data processing (Section 3.3). As additional help, some of the problems commonly encountered with automatically processed vertical velocity profiles are listed in appendices B.1–B.6.

Data editing instructions for `LADCP_w_postproc` are provided in a file called `./EditParams`, a perl script that is executed for each of the `.wsamp` files. (Note that `./EditParams` is executed twice when combining the data from dual-headed LADCP systems into a single profile.) There is a small library of data-editing functions:

`output_resolution(40)`; This statement sets vertical output resolution to 40 m, as appropriate for data collected in a region with weak acoustic backscatter. By default, the output resolution is taken from the input files (i.e. it is set by `LADCP_w_ocean`). Alternatively, it can be set with the `-o` command-line option to `LADCP_w_postproc`.

`bad_range_uc("depth",3700,"*")`; Exclude the upcast vertical velocity data between 3700 m and the seabed from the gridded output profiles. The first argument can be any field name from the `.wprof` input file(s). Any number of “bad ranges” can be defined. The functions `bad_range_dc()` and `bad_range()` are also defined; the latter defines a common range for both downcast and upcast data.

In order to apply data editing only to specific profiles and/or run labels the editing functions must be made conditional with `if`-statements using the variables `$PROF` and `$RUN` as shown in the `ProcessingParams` example in Section 3.2. The following code example excludes the uplooker downcast data from processing of all profiles between 20 and 30:

```
if ($PROF>=20 && $PROF<=30 && $RUN eq "UL") {
    bad_range_dc("depth","*", "*");
}
```

5 Calculating Finescale VKE and ϵ_{VKE} (LADCP_VKE)

5.1 Quantifying Vertical Kinetic Energy from Vertical-Velocity Profiles

Nearly everywhere, instantaneous w_{ocean} at a given depth is dominated by high-frequency (near- N) internal waves. As the typical magnitude of internal-wave related vertical velocities ranges from

405 mm·s⁻¹ to cm·s⁻¹, LADCP data are particularly suitable in principle for estimating internal-wave Vertical Kinetic Energy (VKE). To quantify total VKE, vertical-wavenumber (k_z) spectra derived from the w_{ocean} profiles must be integrated over the entire internal-wave wavenumber range. This is not usually possible, because the long-wavelength cutoff of the internal-wave range is not known. However, observations covering a wide range of environmental parameters (latitude, density stratification, Turner angle, water depth, ...) and dynamical regimes (equatorial thermocline, Drake Passage, Luzon Strait, open abyssal ocean, ...) show that finescale VKE density $\propto k_z^{-2}$ (Thurnherr *et al.*, 2015). The redness of the VKE spectra implies that total VKE is dominated by large vertical scales, emphasizing the problem of not knowing the large-wavelength cutoff required for spectral integration. However, the universality of the VKE vertical-wavenumber power law allows well constrained estimates of VKE density in the internal wave band by fitting the power law to observed spectra and sampling the fitted function at an arbitrary wave number. In Thurnherr *et al.* (2015) the VKE power levels are quantified by p_0 [in units of $\text{m}^2 \cdot \text{s}^{-2} \cdot (\text{rad}/\text{m})^{-1}$], the intercept of the power-law fit carried out in log-space, i.e. p_0 is the VKE density at wavenumber $1 \text{ rad} \cdot \text{m}^{-1}$, corresponding to a vertical wavelength of 6.3 m. This short wavelength can cause confusion because it is not within the finescale range. While this fact does not matter, the confusion can easily be avoided by sampling VKE density at a different wavenumber. For example, $p_{fs} = p[k_z = 0.1 \text{ radm}^{-1}] = 100 \times p_0$ may be more palatable for plotting than p_0 as it represents VKE density at wavelengths of $\approx 65 \text{ m}$, well within the expected internal-wave range.

5.2 Calculating p_0 and ϵ_{VKE} with LADCP_VKE

425 In order to calculate p_0 and apply the VKE finestructure parameterization for turbulent dissipation (ϵ_{VKE}) the utility LADCP_VKE is used. As input, it takes a `.wprof` file, produced either by LADCP_w_ocean (Section 3) or by LADCP_w_postproc (Section 4.3), and it produces a `.VKE` data file, as well as a diagnostic plot (`_VKE.ps`).

By default, the VKE spectra are calculated in half-overlapping windows neither exceeding 32 samples nor 600 m vertical wavelength. (For profiles binned at the default 20 m resolution, 320 m-long windows are used by default.) Data from a 150 m-deep surface layer are ignored by default, i.e. the center of the top window is typically at 310 m. In order to avoid bottom gaps, an additional window is created near the seabed unless the `-b` command-line option is used — note that this bottom window overlaps more than 50% with the window above. By default, the spectra are calculated from combined downcast/upcast data but there `-d` and `-u` can be used to use downcast or upcast data alone. Before calculating the spectra, means are removed (changeable with the `-o` option), and the spectra are corrected for attenuation of the high wavenumbers due to depth-averaging by the instrument and during processing (Thurnherr, 2012).

440 Similar to LADCP-derived horizontal velocity (Polzin *et al.*, 2002), the effective vertical resolution of LADCP-derived vertical velocities is much coarser than the bin length used to acquire the data. The universal k_z^{-2} power law is again useful in this context, because it allows determination of the noise-cutoff wavelength from the spectra (Thurnherr *et al.*, 2015). By default, LADCP_VKE uses a 100 m vertical-wavelength cutoff which is suitable (somewhat conservative) for many “typical” LADCP data sets. The short-wavelength cutoff can be modified with the `-c` command-line option.

445 For each spectral window, the output data files produced by LADCP_VKE contain the following fields:

`widx` Index of spectral window, counting downward from 1 near the surface; The bottom window has `widx = -1`.

`depth`, `depth.min`, `depth.max` mean depth in meters, as well as upper and lower limits of spectral

450 window.

hab Mean height above the seabed (in meters) of the spectral window.

nsamp Number of w_{ocean} profiles used to determine each spectrum. Usually **nsamp** = 2 when spectra are calculated from combined downcast/upcast data (unless one of the two is missing or has long gaps) and **nsamp** = 1 otherwise.

455 **pwrdens.0, pwrdens.1, ...** VKE power spectral densities in units of $\text{m}^2 \cdot \text{s}^{-2} \cdot (\text{rad}/\text{m})^{-1}$; the corresponding vertical wavenumbers (**wspec::k.0, wspec::k.1, ...** in units of $\text{rad} \cdot \text{m}^{-1}$) and wavelengths (**wspec::lambda.0, wspec::lambda.1, ...** in units of meters) are included in the file metadata.

pwr.tot, pwr.fs VKE power integrated across the entire spectrum and across the finescale wavenumber range, respectively. Note that these powers are not corrected, e.g. for removal of the means.

460 **p0** VKE power density of the k_z^{-2} power-law fit sampled at $k_z = 1 \text{ rad} \cdot \text{m}^{-1}$.

p0fit.nsamp, p0fit.r, p0fit.rms Statistics for assessing the k_z^{-2} power-law fit: **p0fit.nsamp** contains the number of w_{ocean} values in the spectral window; **p0fit.r** contains the correlation coefficient (in log-log space) of finescale VKE density vs. vertical wavenumber; **p0fit.rms** contains the *rms* difference between the VKE samples and the fitted power law.

465 **eps.VKE** VKE-finescale-parameterization estimate of kinetic energy dissipation in units of $\text{W} \cdot \text{kg}^{-1}$, calculated under the following conditions:

1. Profile is poleward of 5° of latitude.
2. VKE spectrum is red (**p0fit.r** < 0).
3. Spectral fit is reasonable (**p0fit.rms** <= 0.4)
4. VKE spectral levels are significant [$p_0 \geq 10^{-7} \text{ m}^2 \cdot \text{s}^{-2} \cdot (\text{rad}/\text{m})^{-1}$].

The last of these conditions is necessary in order to filter out the low- p_0 samples apparent at $\epsilon \leq 2 \times 10^{-10} \text{ W} \cdot \text{kg}^{-1}$ in Fig. 2 of *Thurnherr et al.* (2015). [Due to the small magnitudes of the corresponding p_0 values, these samples do not affect the averages (error bars) in any significant way.]

475

5.3 Quality Control and Interpretation of LADCP-Derived VKE and ϵ_{VKE}

LADCP_VKE produces diagnostic plots that show both VKE spectra and derived ϵ_{VKE} profiles (Figure 10). Gaps in VKE profiles (e.g. left figure panel) are common. In general, the number of gaps tends to increase with decreasing VKE levels. High-quality profiles have fewer gaps than profiles associated with measurement problems. The overlapping windows allows a simple visual assessment of the profile consistency. In case of the example profiles shown in Figure 10, the scatter of the ϵ_{VKE} estimates suggest that the turbulence levels below 2500 m are not very tightly constrained.

480

A much better assessment is possible when independent estimates ϵ_{VKE} are compared. For data collected with dual-headed LADCP systems, separate estimates can be derived from the DL and UL profiles. For single-instrument LADCP profiles, separate estimates can be calculated from the downcast and upcast data. In case of the left example profiles shown in Figure 10, separate downcast/upcast profiles indicate that the apparent surface intensification of turbulence is likely real (not shown).

485

It is important to note that ϵ_{VKE} profiles should be interpreted the same way as microstructure-derived dissipation data. In particular

490

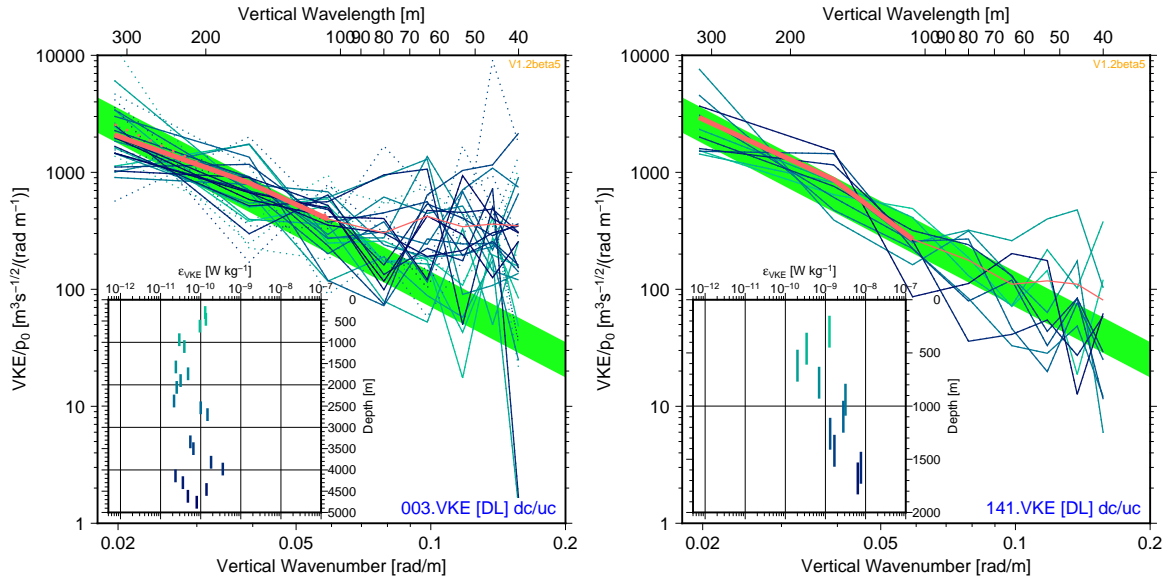


Figure 10: Example `_VKE.ps` diagnostic plots from DIMES US2 cruise with weak (left panel) and strong (right panel) vertical velocities (same profiles as used in Figure 2). Samples from each window are plotted in blue, with darker shades indicating deeper depths. Main panels: p_0 -normalized VKE spectral density vs. vertical wavenumber; individual window spectra are plotted in blue, with dots indicating spectra that do not pass the tests required for estimating ϵ_{VKE} (Section 5.2); solid and dotted pink lines show mean spectra calculated from only the good and from all window spectra, respectively; the finescale ranges used for the spectral fits are marked with the heavy line of the mean spectra (100–320 m in these cases); the mean finescale spectra should lie entirely on top of the green-shaded areas, which encompass factor-2 uncertainties in the derived ϵ_{VKE} estimates. Insets: ϵ_{VKE} profiles derived from the good window spectra using the parameterization of *Thurnherr et al.*, 2015.

495

- Strictly speaking ϵ_{VKE} is a measure of internal-wave energy and not of kinetic energy dissipation. The correlation between the two described by *Thurnherr et al.* (2015) requires significant averaging to yield estimates accurate within factor two.
- The correlation between ϵ and VKE levels becomes highly uncertain in regions of weak turbulence (Fig. 2 in *Thurnherr et al.*, 2015). Therefore, ϵ_{VKE} should not be used, for example, to infer regions of buoyancy flux convergence or divergence (from $\partial\epsilon_{\text{VKE}}/\partial z$) in the abyssal ocean.
- Estimates for ϵ_{VKE} are only calculated for data passing a number of consistency checks. It is possible that these checks (filters) introduce bias into averages calculated from the resulting estimates, especially in regions of weak internal-wave activity and turbulence.

500 A Alternative CSV File Format For CTD Data

The preferred formats for CTD time-series data are binary or ASCII SBE CNV files, because they contain useful meta-data. The simple ASCII CSV (comma-separated values) format described here allows for fewer consistency checks and, therefore, requires additional care. The following assumptions are made for CSV ASCII CTD time series files:

- 505 1. 24 Hz sampling frequency
2. pressure in units of dbar
3. temperature in units of °C using ITS-90
4. conductivity in units of $\text{mS}\cdot\text{cm}^{-1}$

510 Each CSV ASCII CTD file has a single header line listing the latitude and longitude of the profile, followed by the data records with scan number, pressure, *in situ* temperature and conductivity. Scan numbers must be consecutive and start at 1. Missing values are allowed, but comments and empty lines are not. The following shows the beginning of an example CSV ASCII CTD file, with two missing values:

```
515 -53.939,86.57
      1,12.525,3.8788,31.499201
      2,12.433,3.8789,
      3,12.468,3.8788,31.499325
      4,12.419,,31.499388
      5,12.489,3.8788,31.499013
520 6,12.419,3.8788,31.499075
```

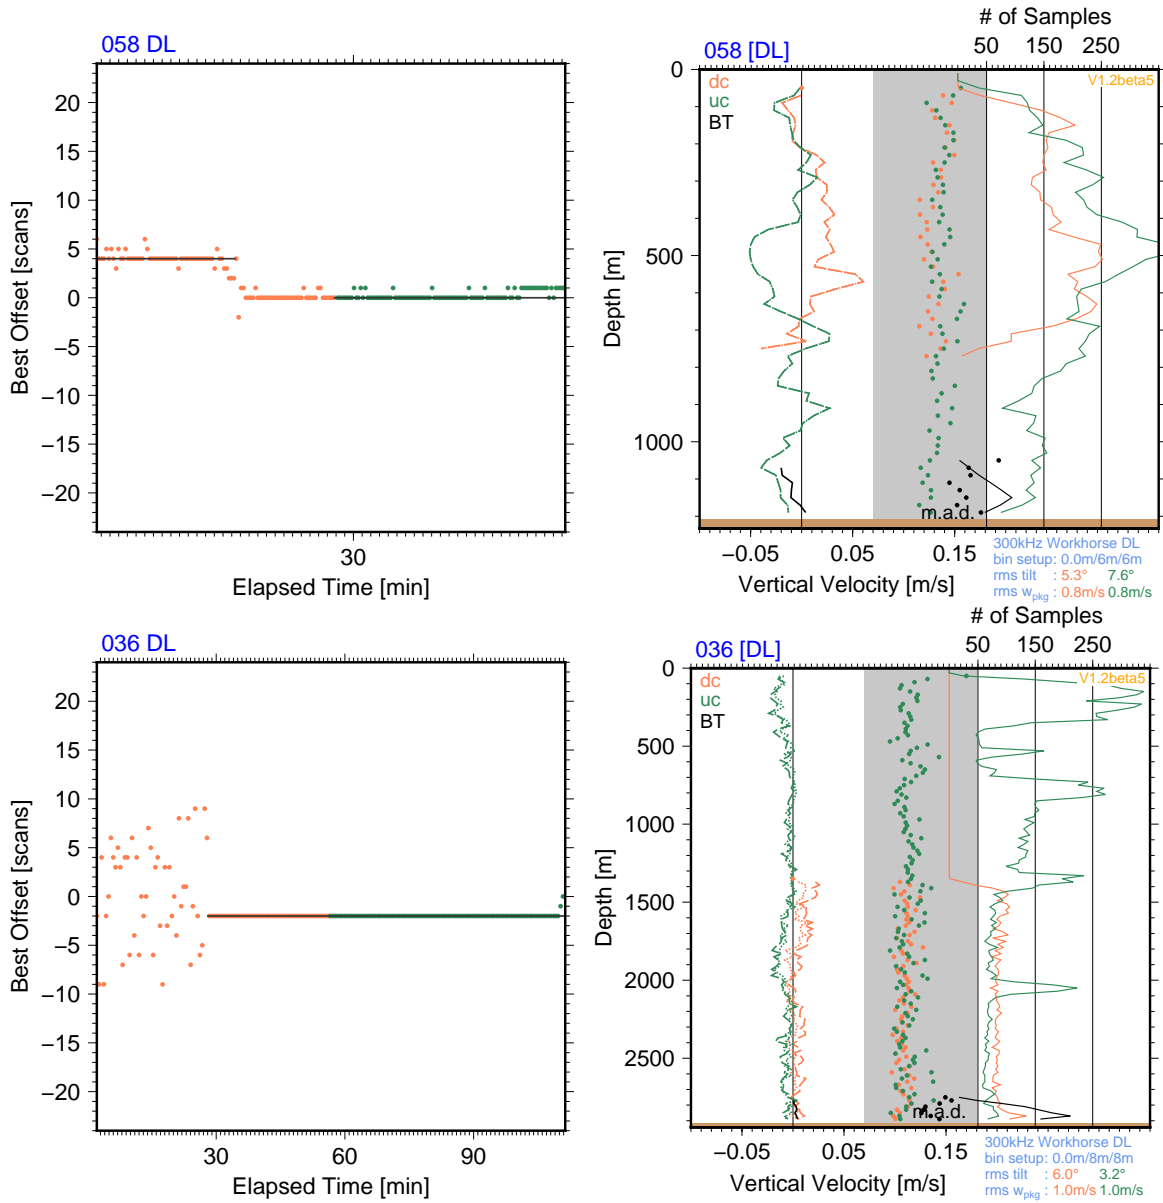


Figure 11: Diagnostic plots from two example profiles (upper and lower panels, respectively) with dropped CTD scans. Left panels: `_time_lags` plots. Right panels: `_wprof` plots.

B Common Data Problems

B.1 Dropped CTD Scans

As described in Section 2 data transmission problems in the CTD system cause dropped scans. As long as only one or two “scan-drop events” occur during a profile this problem is usually easily

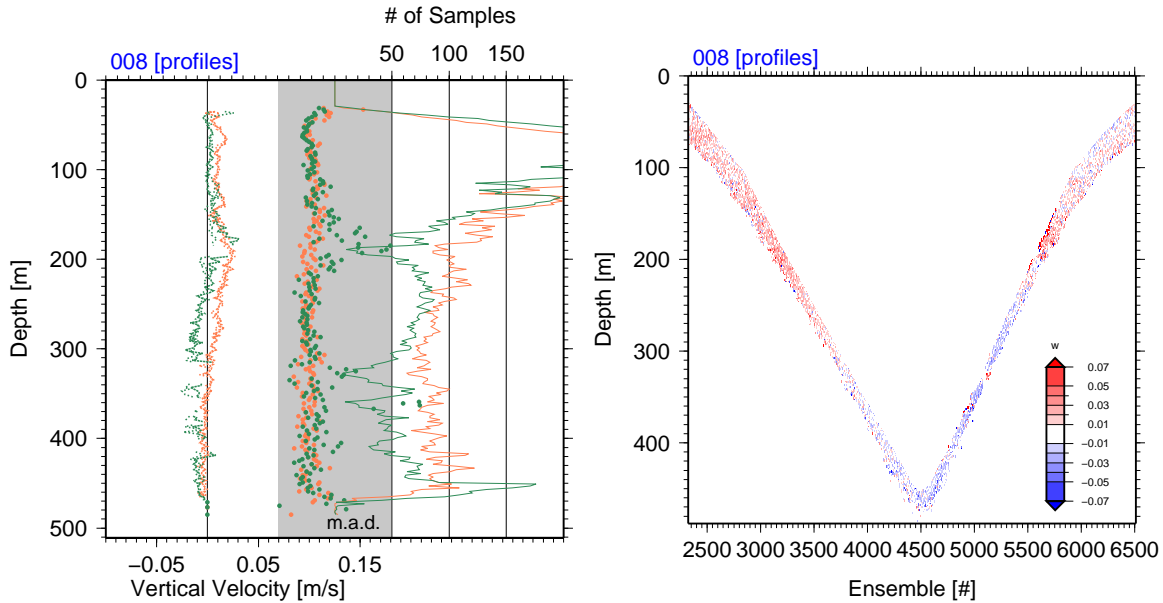


Figure 12: Diagnostic plots from a profile from the equatorial Pacific with insufficient sampling; software V1.1. Left panel: `_wprof` plot. Right panel: `_wsamp` plot.

525 detectable in the `_time_lags` plots (Figure 11). Profiles with more than two “scan-drop events,”
on the other hand, usually cannot be processed with `LADCP_w_ocean` at all. In the example shown
in the upper two figure panels three CTD scans (1/8 s worth of data) were dropped approximately
15 min after the beginning of the cast. As the pre-drop time lag is used for the downcast (solid
line) the downcast data after the dropped scans are bad and are removed by the automatic editing.
530 [Alternatively, the `-p` option of `LADCP_w_ocean` can be used to carry out “piece-wise” time lagging.
By default, `LADCP_w_ocean` lags the downcast and upcast data separately.] In the example shown in
the bottom two panels of the figure, the number of scans dropped was too great for the time-lagging
algorithm to work correctly at the beginning of the cast.

B.2 Insufficient Sampling & Profile Gaps

535 Bad ADCP data, e.g. due to insufficient acoustic scattering or large instrument tilts, can cause
insufficient sampling and, in extreme cases, gaps in the vertical-velocity profiles. While such data gaps
are not problematic *per se* (Section 1), there are often vertical-velocity artifacts where the number of
samples per depth bin is low, including at the edges of profile gaps, as well as near the sea surface and
seabed. In the example shown in Figure 12, there are insufficient (<40, in this case) upcast samples
540 in the following depth ranges: 186–196 m, 316–338 m, 356–368 m, 402–414 m, in addition to couple of
isolated single-record gaps. At the edges of some of these gaps (e.g. just above 185 m in Figure 12,
and also at both edges of the wake-affected upcast data gap shown in the right panel of Figure 13),
there are clear artifacts that must be removed during post-processing. Alternatively, the gaps in this
profile can be avoided altogether by processing (or post-processing) at a coarser vertical resolution.

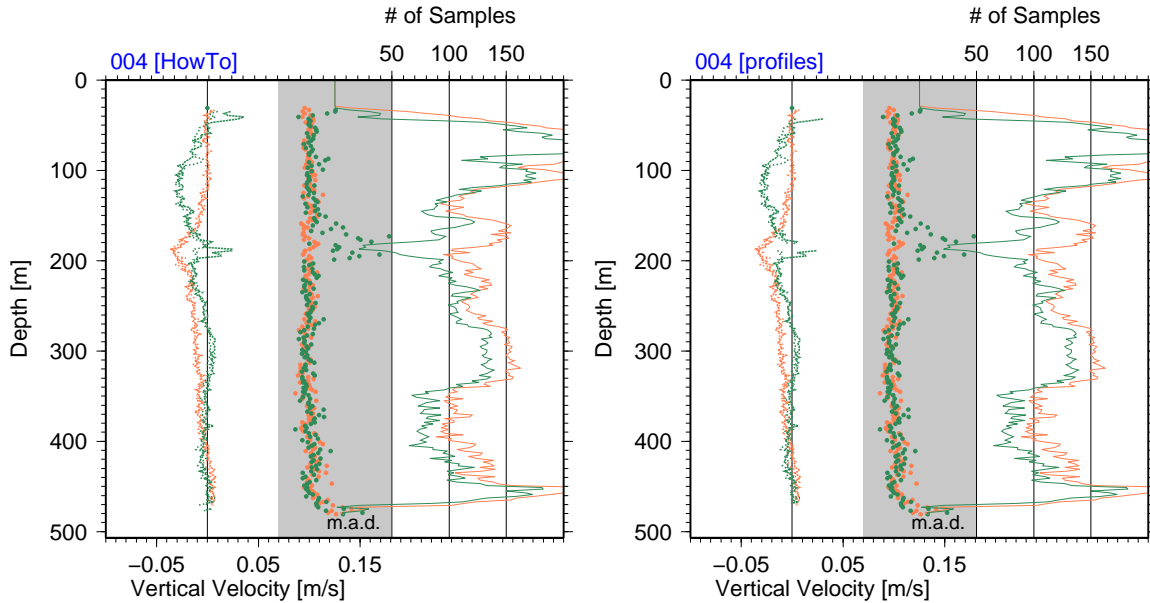


Figure 13: Diagnostic `w_prof` plots from an equatorial Pacific profile affected by package wake; software V1.1. Left panel: Profile processed with the requirement of ≥ 20 samples per depth bin. Right panel: Profile processed with the requirement of ≥ 40 samples per depth bin.

545 B.3 Package-Wake Effects

It is a fairly common observation in LADCP work that uplooker downcast data and/or downlooker upcast data are affected by package wakes. In the context of vertical-velocity processing, these wakes manifest themselves as vertically coherent layers where the two independent 2-beam solutions for w_{ocean} disagree significantly. In the example shown in Figure 13 package-wake effects affect the upcast data between 50 and 100 m and, more importantly, the wake causes an erroneous apparent upwelling peak centered at 190 m in one of the two 2-beam upcast solutions, which must be removed during post-processing.

550 It is important to note that the difference between the two 2-beam solutions is identical (except for a scaling constant) to the so-called ADCP *error velocity*. Since error velocity is used as a data-editing criterion in `LADCP_w_ocean`, the most severely wake-affected samples are discarded automatically during processing, leading to gaps in the w_{ocean} profiles and gap-edge artifacts (Section B.2), which can be difficult to attribute to wake effects (right panel in Figure 13).

B.4 Vertically Moving Organisms

560 Not all vertical motion measured by ADCPs near the sea surface is due to vertically moving water, as at least some of the organisms giving rise to the acoustic backscatter required for ADCP measurements are capable of rapid vertical movement. There are regions where vertical plankton migrations dominate upper-ocean ADCP vertical-velocity measurements at certain times of the day (e.g. *Fischer and Visbeck, 1993b*). In the example shown in Figure 14 there is a likely ≈ 10 m-thick layer of upward-moving plankton rising from 160 to 60 m during the cast (left panel). While this vertically moving layer does not appear to affect the processed w_{ocean} profiles significantly (right figure panel) there

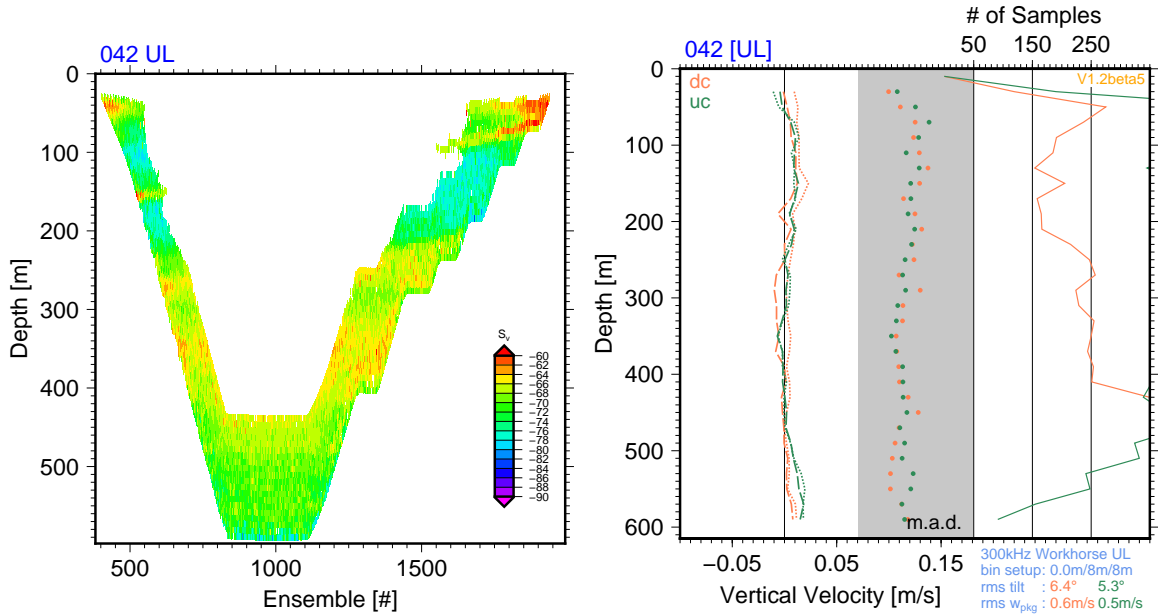


Figure 14: Diagnostic plots from a profile with a likely ≈ 10 -m-thick layer of vertically moving plankton rising from 160 to 60m during the cast; software V1.0. Left panel: S_v plot; the anomalous vertical structure of acoustic backscatter below 400m is due to imperfections in the backscatter calculation algorithm. Right panel: w_{prof} plot.

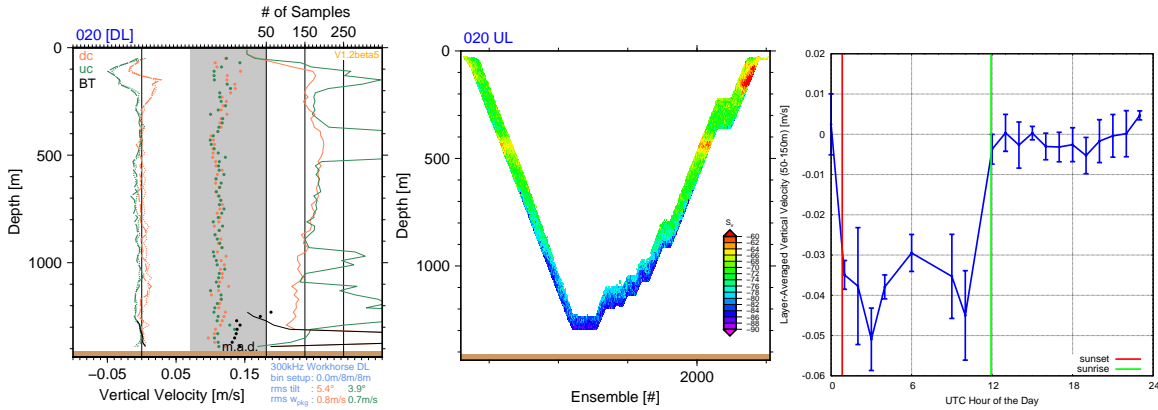


Figure 15: Upper-ocean vertical velocity signals in the northeastern Gulf of Mexico likely caused by biology. Left and middle panels: Diagnostic w_{prof} and $backscatter$ plots from an example profile with strong apparent downwelling observed during the upcast in the upper 200 m of the water column. Right panel: Average w_{ocean} between 50 and 150m vs. hour of the day for all profiles from this site.

are apparent downcast artifacts associated with another thin acoustic scattering layer near 160 m.

Vertical velocities in the upper ocean should generally be treated with particular caution, especially in regions of high biological productivity. In a data set collected in the northeastern Gulf

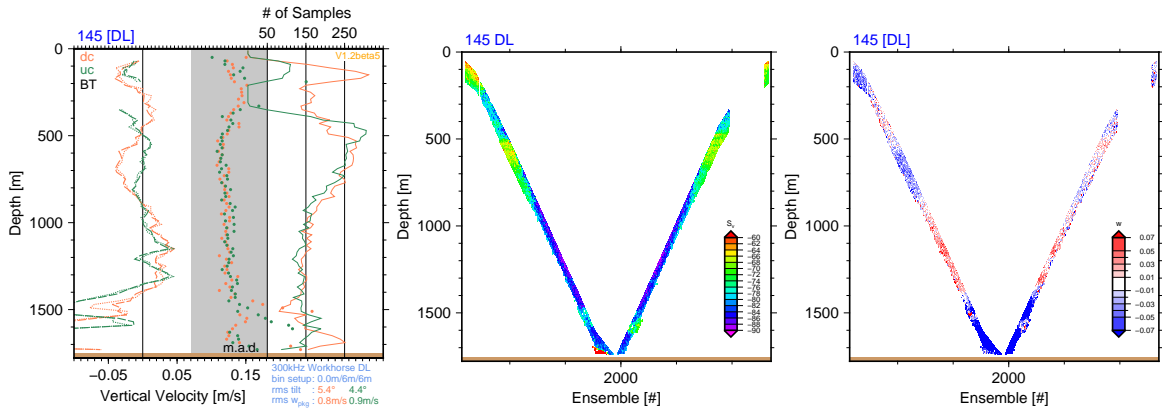


Figure 16: Diagnostic plots from a profile in a region with very strong turbulence. From left to right: `_wprof`, `_Sv` and `_w` plots, respectively.

of Mexico, for example, consistently strong downward motion was observed in the upper 200 m in the profiles taken between sunset and sunrise, but not during daylight hours (Figure 15). While inconsistent with diel vertical plankton migration, the observed downward motion is associated with strong acoustic backscatter anomalies (middle panel), consistent with the hypothesis that the apparent motion is caused by swimming organisms, which are perhaps fleeing into deeper water to avoid the approaching instrument rosette.

B.5 Boundary Effects

In addition to biology, there are other causes for potential contamination near the sea surface, including reduced sampling, interference from acoustic instruments mounted on the surface vessel, sidelobe reflections from its hull and the sea surface, as well as high-frequency vertical motion associated with (long) surface-gravity waves. Near the seabed, reduced sampling and sidelobe reflections from steep topography can adversely affect the data. (Sidelobe contamination from the seabed affects uplooker data just as much as downlooker data, which makes it important that the water depth is set correctly when processing uplooker profiles; Section 3.1.) Vertical-velocity spikes near the surface or seabed must be removed from the data during post-processing.

B.6 Strong Turbulence

High levels of turbulence in regions such as Drake Passage and Luzon Strait can affect LADCP-derived vertical-velocity profiles. The example profile shown in Figure 16 was collected slightly east of the crest of a meridionally trending ridge blocking deep flow through Luzon Strait. At the time of observation, there was strong eastward bottom-intensified flow at the location. Following the sloping topography, the eastward flow is associated with strong downwelling (left figure panel). Both the elevated acoustic backscatter between 1500 and 1600 m (center panel) and the bursts of upward motion embedded within the strongly downwelling background (right panel) are consistent with the signatures of large turbulent eddies in this layer of extreme vertical shear of the zonal flow ($\approx 0.5 \text{ m} \cdot \text{s}^{-1}$ over 100 m). The vertical velocities associated with the turbulent eddies contaminate both downcast and upcast profiles of w_{ocean} (left panel).

References

595

600

605

610

615

- Deines, K. L., 1999: *Proceeding, CWTMC'99 (IEEE)*.
- Firing, E. and R. Gordon, 1990: Deep ocean acoustic Doppler current profiling. *IEEE Fourth Working Conf. on Current Measurements*, 192–201.
- Fischer, J. and M. Visbeck, 1993a: Deep velocity profiling with self-contained ADCPs. *J. Atm. Oc. Tech.* **10**, 764–773.
- Fischer, J. and M. Visbeck, 1993b: Seasonal variation of the daily zooplankton migration in the Greenland Sea. *Deep Sea Res. I* **40**, 1547–1557.
- Polzin, K., E. Kunze, J. Hummon, and E. Firing, 2002: The finescale response of lowered ADCP velocity profiles. *J. Atm. Oc. Tech.* **19**, 205–224.
- Thurnherr, A. M., 2010: A practical assessment of uncertainties in full-depth velocity profiles obtained with Teledyne/RDI Workhorse Acoustic Doppler Current Profilers. *J. Atm. Oc. Tech.* **27**, 1215–1227.
- Thurnherr, A. M., 2011, (March): Vertical velocity from LADCP data. *Proceeding, CWTMC'11 (IEEE)*.
- Thurnherr, A. M., 2012: The finescale response of lowered ADCP velocity measurements processed with different methods. *J. Atm. Oc. Tech.* **29**, 597–600.
- Thurnherr, A. M., S. S. Jacobs, P. Dutrieux, and C. F. Giulivi, 2014: Export and circulation of ice cavity water in Pine Island Bay, West Antarctica. *J. Geophys. Res.* **119**, 1754–1764.
- Thurnherr, A. M., L. St. Laurent, K. J. Richards, J. M. Toole, E. Kunze, and A. Ruíz Angulo, 2015: Vertical kinetic energy and turbulent dissipation in the ocean. *Geophys. Res. Lett.* **42**, 7639–7647.
- Visbeck, M., 2002: Deep velocity profiling using Lowered Acoustic Doppler Current Profilers: Bottom track and inverse solutions. *J. Atm. Oc. Tech.* **19**, 794–807.