

**APPLICATION FOR
FEDERAL ASSISTANCE**

Version 7/03

1. TYPE OF SUBMISSION: Application <input type="checkbox"/> Construction <input checked="" type="checkbox"/> Non-Construction		Pre-application <input type="checkbox"/> Construction <input type="checkbox"/> Non-Construction	2. DATE SUBMITTED 4/28/06	Applicant Identifier NIW
			3. DATE RECEIVED BY STATE	State Application Identifier SAI Exempt
			4. DATE RECEIVED BY FEDERAL AGENCY	Federal Identifier 06HQGR0106
5. APPLICANT INFORMATION				
Legal Name: The Trustees of Columbia University in the City of New York			Organizational Unit: Department: Lamont-Doherty Earth Observatory	
Organizational DUNS: 049179401			Division: Seismology, Geology & Tectonophysics	
Address: Street: 254 Engineering Terrace, 1210 Amsterdam Avenue, MC 2205			Name and telephone number of person to be contacted on matters involving this application (give area code)	
City: New York			Prefix:	First Name: Lewis
County:			Middle Name	
State: New York			Zip Code 10027	Last Name Greenbaum
Country: USA			Suffix:	
6. EMPLOYER IDENTIFICATION NUMBER (EIN): 1 3 - 5 5 9 7 0 9 3			Phone Number (give area code) 212-342-0022	Fax Number (give area code) 212-854-3738
8. TYPE OF APPLICATION: <input type="checkbox"/> New <input checked="" type="checkbox"/> Continuation <input type="checkbox"/> Revision If Revision, enter appropriate letter(s) in box(es) (See back of form for description of letters.) <input type="checkbox"/> <input type="checkbox"/> Other (specify)			7. TYPE OF APPLICANT: (See back of form for Application Types) J Other (specify)	
10. CATALOG OF FEDERAL DOMESTIC ASSISTANCE NUMBER: 1 5 - 8 0 7			9. NAME OF FEDERAL AGENCY: U.S. Geological Survey	
TITLE (Name of Program): Earthquake Hazards Reduction Program			11. DESCRIPTIVE TITLE OF APPLICANT'S PROJECT: Calibration of Seismographic Stations for Improved Earthquake Location in 43 States	
12. AREAS AFFECTED BY PROJECT (Cities, Counties, States, etc.): Eastern, Central & Intermountain U.S.			14. CONGRESSIONAL DISTRICTS OF: a. Applicant 8 b. Project 16, 17	
13. PROPOSED PROJECT Start Date: 1/1/2007 Ending Date: 12/31/2007			16. IS APPLICATION SUBJECT TO REVIEW BY STATE EXECUTIVE ORDER 12372 PROCESS? a. Yes. <input type="checkbox"/> THIS PREAPPLICATION/APPLICATION WAS MADE AVAILABLE TO THE STATE EXECUTIVE ORDER 12372 PROCESS FOR REVIEW ON DATE: b. No. <input checked="" type="checkbox"/> PROGRAM IS NOT COVERED BY E. O. 12372 <input type="checkbox"/> OR PROGRAM HAS NOT BEEN SELECTED BY STATE FOR REVIEW	
15. ESTIMATED FUNDING:			17. IS THE APPLICANT DELINQUENT ON ANY FEDERAL DEBT? <input type="checkbox"/> Yes If "Yes" attach an explanation. <input checked="" type="checkbox"/> No	
a. Federal	\$	97,212 ⁰⁰		
b. Applicant	\$	⁰⁰		
c. State	\$	⁰⁰		
d. Local	\$	⁰⁰		
e. Other	\$	⁰⁰		
f. Program Income	\$	⁰⁰		
g. TOTAL	\$	97,212 ⁰⁰		
18. TO THE BEST OF MY KNOWLEDGE AND BELIEF, ALL DATA IN THIS APPLICATION/PREAPPLICATION ARE TRUE AND CORRECT. THE DOCUMENT HAS BEEN DULY AUTHORIZED BY THE GOVERNING BODY OF THE APPLICANT AND THE APPLICANT WILL COMPLY WITH THE ATTACHED ASSURANCES IF THE ASSISTANCE IS AWARDED.				
a. Authorized Representative				
Prefix	First Name Lewis		Middle Name	
Last Name Greenbaum			Suffix	
b. Title Sr. Project Officer			c. Telephone Number (give area code) 212-342-0022	
d. Signature of Authorized Representative			e. Date Signed	

PROPOSAL INFORMATION SUMMARY

1. Panel Destination: NIW
2. Project Title: Calibration of Seismographic Stations for Improved Earthquake Location in 43 States
3. Principal Investigator(s): Paul Richards
Lamont-Doherty Earth Observatory of Columbia University
61 Rt. 9W, PO Box 1000
Palisades, NY 10964
Phone: 845-365-8389, Fax: 845-365-8150
E-mail richards@ldeo.columbia.edu

Won-Young Kim, Co-PI
Lamont-Doherty Earth Observatory of Columbia University
61 Rt. 9W, PO Box 1000
Palisades, NY 10964
Phone: 845-365-8387, Fax: 845-365-8150
E-mail [wykim@ldeo.columbia.edu](mailto:wkim@ldeo.columbia.edu)
4. Authorized Institutional Representative: Lewis Greenbaum, Sr. Project Officer
Columbia University
Office of Contracts and Grants
254 Engineering Terrace
1210 Amsterdam Ave., MC 2205
New York, NY 10027

Phone: 212-342-0022, Fax: 212-854-2738
E-mail: lg2324@columbia.edu
5. Program Element Designation III
6. Amount Requested: \$97,212
7. Proposed Start Date: January 1, 2007
8. Proposed Duration: 1 Year
9. New Proposal
Renewed Funding
Proposal is a continuation of: 06HQGR0106
Calibration of Seismographic Stations for Improved Earthquake Location in 43 States
10. Active Earthquake-Related Research Grants, and Level of Support: See Current & Pending Statement
11. Has this proposal been submitted to any other agency for funding, if so, which? No
12. Proposal Abstract: See Attached
13. Proposal Budget Summary See Attached

TABLE OF CONTENTS

Application for Federal Assistance	1
Proposal Information Summary	2
Table of Contents	3
Abstract	4
Budget Summary	5
Proposed Budget	6
Significance of the Project	7
Project Plan	7
Background	7
Proposed Work	10
Progress to Date	12
Final Report and Dissemination	13
Related Efforts	13
References Cited	16
Project Personnel and Bibliography of Related Work	17
Institutional Qualifications	21
Project Management Plan	21
Current and Pending/Continuation Projects	22
Continuation Projects	25

ABSTRACT

We propose work requiring a second year of funding, in a project to improve estimates of earthquake location in the easternmost 40 States of the U.S. --- plus parts of Arizona, Nevada, and Idaho --- by calibrating the seismographic stations routinely used by the NEIC for earthquake location in this region. Such calibration, which entails finding the travel time of seismic waves from all candidate locations to each of about 60 stations, represents a radical departure from current practice based on use of globally averaged travel time models. To this end we received a first year of funding to use methodology developed during 2000–2003 in a major project, led by Lamont, to improve seismic locations throughout East Asia using regional seismic signals from stations of the International Monitoring System of the Comprehensive Test Ban Treaty Organization. That methodology uses Source Specific Station Corrections (SSSCs) and has been extensively documented. It achieved significantly improved locations in East Asia. We originally proposed a two year program of research to apply it to 43 states of the USA, and now seek funding for the second year.

The methodology consists of an integrated series of steps that for this proposal will include:

- (1) development of regional velocity models of crust and upper mantle, with their associated travel times, for a few tens of sub-regions of continental North America;
- (2) computation of regional travel times using 3D ray tracing for paths that cross between sub-regions, thus giving model-based 3D travel times prepared separately for each station;
- (3) obtaining empirical travel times for stations to be calibrated (or their surrogates), using reference events (sometimes called ground truth events);
- (4) application of kriging methods to empirical travel times (with the model-based 3D travel times as background) to obtain new 3D travel times, for a grid of candidate source locations out to several hundred km from each station to be calibrated. The outcome of (1) through (4) is a travel-time model satisfying empirical data as well as broad sets of information on Earth structure.
- (5) The final work consists of assessing performance of the travel time model, and evaluation of standard metrics that assess the extent of location improvement when our model-based travel times and our kriged travel times are used for each station in the network of stations used for event location by the NEIC in 43 States of the U.S. (including the intermountain west).

Our project objectives are to assist the NEIC in meeting an important performance standard for event location put forward in the current document titled "Draft ANSS Performance Standards" — namely, that seismic events in sparsely instrumented regions should have average location uncertainty amounting to 5 km horizontally. We anticipate that we shall be able to document what location performance actually is at the present time for the 43-State region, using event location methods based on current practice (phase picks interpreted via the Earth model ak135); and to demonstrate that our methods of event location based upon use of SSSCs achieve more accurate locations in this region.

Since accurate locations are needed as the starting point for almost all quantitative earthquake studies (hazards, structure, engineering, earthquake physics, interactions between earthquakes in a sequence), as well as for emergency management, direction of fieldwork following a significant mainshock, and providing information to the public, our project will have wide implications. In particular our results will reduce losses from earthquakes in the United States by elevating the quality of almost all quantitative studies of earthquake hazard and earthquake interactions for the region we propose to study.

BUDGET SUMMARY

Project Title: Calibration of Seismographic Stations for Improved Earthquake Location in 43 States

Principal Investigator(s) Paul Richards, PI
Won-Young Kim, Co-PI

Proposed Start Date: January 1, 2007

Proposed Completion Date: December 31, 2007

Cost Category	Federal First Year	Federal Second Year ²	Total Both Years ²
1. Salaries and Wages	\$ 42,808.00		
Total Salaries and Wages	\$ 42,808.00	\$ -	
2. Fringe Benefits/Labor Overhead	\$ 11,387.00		
3. Equipment			
4. Supplies	\$ 400.00		
5. Services or Consultants			
6. Radiocarbon Dating Services			
7. Travel	\$ 6,834.00		
8. Publication Costs	\$ 2,550.00		
9. Other Direct Costs	\$ 400.00		
10. Total Direct Costs (items 1-9)	\$ 64,379.00	\$ -	
11. Indirect cost/General and Administrative (G&A) cost	\$ 32,833.00		
12. Amount Proposed (items 10 & 11)	\$ 97,212.00	\$ -	
13. Total Project Cost (Total of Federal and non-Federal amounts)	\$ 97,212.00	\$ -	

¹ This form shows the format of the budget summary. Use this sheet for the Budget Summary which precedes the detailed budget. The detailed budget must be keyed directly to the Budget Summary page.

² These Columns are only for multi-year projects

PROPOSED RESEARCH BUDGET

DETAILED BUDGET		
TITLE:	Calibration of Seismographic Stations for Improved Earthquake Location in 43 States	
PRINCIPAL INVESTIGATOR:	Paul Richards, PI Won-Young Kim, Co-PI	
DATE:	January 1, 2007 - December 31, 2007	
AMOUNT:	\$97,212	
SALARIES AND WAGES		
Senior Personnel		1/1/07 - 12/31/07
P. Richards, Professor	1.0 summer	*
W.Y. Kim, Doherty Research Scientist	1.00	*
W. Menke, Professor	0.5 summer	*
F. Waldhauser, Doherty Assoc. Research Sci*	1.00	*
D. Schaff, Doherty Assoc. Research Sci.	1.00	*
Total Salaries and Wages:		\$42,808
Fringe Benefits	26.60%	\$11,387
Total Salaries, Wages and Fringe Benefits:		\$54,195
TRAVEL		
Travel, Domestic**		
<i>Visit to USGS</i>		
R/T NY/Denver	2 people @ \$541 / person	\$1,082
Subsistence	2 people X 4 days @ \$173/day	\$1,384
Ground transportation	2 people X \$100 each	\$200
<i>Annual SSA Meeting 2007</i>		
R/T NY/Big Island, Hawaii	2 people @ \$899 / person	\$1,798
Subsistence	2 people X 4 days @ \$200/day (partial)	\$1,600
Ground transportation	2 people X \$100 each	\$200
Registration Fee	2 X \$285	\$570
Total Domestic Travel:		\$6,834
OTHER DIRECT COSTS		
1. Materials and Supplies:	Misc. office /computer supplies	\$400
2. Publications	12 Pages in BSSA	\$2,550
6. Other		
Communications and shipping	Shipping	\$400
Total Other Direct Costs:		\$3,350
Total Direct Costs:		\$64,379
Modified Total Direct Costs (Base):		\$64,379
Indirect Cost Recovery @ 51%:		\$32,833
Total Direct and Indirect Costs:		\$97,212

* Promotion Anticipated

** Travel: budgeted at a 14 day advance non-refundable penalty rate

PROPOSAL BODY

Significance of Project

Earthquake location estimates in the eastern, central, and intermountain west regions of the United States have often been significantly in error, by distances commonly amounting to 10–20 km. The low quality of such location estimates has long been a handicap to virtually all aspects of the study of seismic hazard in this vast region, and a handicap too in communications with the news media and between different scientific groups. The problem has been around for more than 60 years, in that basic procedures for earthquake location have barely changed since the late 1930s: the great majority of earthquakes have been routinely located one-at-a-time by NEIC and its predecessor agencies using measurements of the arrival time of various seismic waves at different stations, and interpreting these arrivals in a globally-averaged Earth structure. Though seismic data has vastly improved in quality, quantity, and accessibility in recent decades, earthquake location methods have changed very little. Of particular significance, are the errors resulting from use of the same theoretical travel time curves to interpret arrival times at all stations for regional waves such as *Pg*, *Pn*, *Sn*, *Lg*, when (for example) *Pn* velocities are known to vary laterally in the range from 7.6 to 8.3 km/s within the continental U.S.

The expected results from our proposed work, are that we shall enable the National Earthquake Information Center of the U.S. Geological Survey to provide significantly more accurate earthquake locations in its widely used publications such as the "Quick Determination of Epicenters" (QDE) and the "Preliminary Determination of Epicenters" (PDE), for earthquakes throughout the eastern, central, and intermountain west of the U.S. The QDE and PDE are used by emergency managers, by those engaged in studies of earthquake hazard, and by scientists and engineers carrying out fundamental studies interpreting seismograms (including strong motion records) from events whose location is needed to be accurately known in order for the quantitative results to be used with confidence. Accurate locations are needed for the basic work of identifying active faults as well as for tomographic studies. Prompt accurate locations for mainshocks are needed for emergency management, and to provide guidance to those engaged in field work (for example to install temporary stations to carry out aftershock studies). Accurate earthquake locations are required as the *sine qua non* for essentially ALL quantitative studies of earthquake hazard. Our expected results will therefore reduce losses from earthquakes in the United States by elevating the quality of almost all quantitative studies of earthquake hazard.

We note that the Advanced National Seismic System (ANSS) in the current document titled "Draft ANSS Performance Standards" has set the standard for locations in sparsely instrumented regions as having average location uncertainty amounting to 5 km horizontally, i.e. considerably smaller than current uncertainties. Our proposal is directed toward the attainment of this capability for the ANSS.

Project plan

Background For decades, the U.S. Geological Survey (NEIC) and predecessor agencies responsible for earthquake monitoring have located earthquakes both globally and on U.S. territory by interpreting the observed arrival times of seismic waves using the Jeffreys-Bullen travel-time model. Beginning in January 2004 this procedure at the NEIC was changed slightly, to use of the more modern travel-time model known as ak135. The main problem with these models, in application to earthquake location for events in the continental U.S. outside dense regional networks, is their failure to provide a framework within which regional travel times can be treated as path-dependent, and not merely a function of distance and depth. Note that *Pn* and *Sn* velocities can vary laterally by plus/minus about 5%. It would appear that to improve estimates of absolute earthquake location, there is no way to make progress that does not accommodate path-dependence.

A sense of the need to develop path-dependent travel times can be seen from Figure 1, which shows considerable scatter of *P*-wave arrivals for sources and stations in the central and eastern U.S., when compared with ak135 travel times. The scatter is far greater than the reading errors.

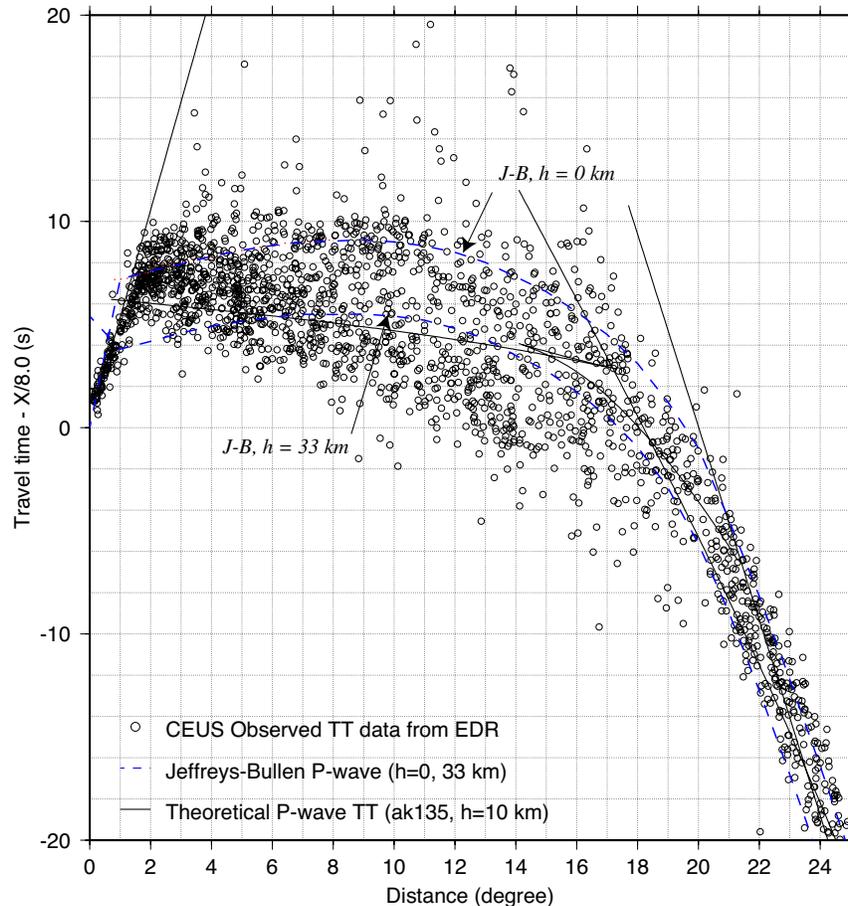


Figure 1. Reduced travel times for P -waves out to 24° . The data are taken from Earthquake Data Reports, for events and stations in the central and eastern U.S., and are shown in a comparison with the ak135 and J-B travel time models. Though some reduction in scatter would be obtained by use of the correct depth for each event, the main points are that scatter ranges over about ± 5 s, and it is impossible to fit these data well with a purely distance-dependent travel time model.

Recognition of the need for path-dependent travel times became very apparent following the GNOME nuclear explosion of December 1961 in a bedded salt formation near Carlsbad, NM, which led Romney et al. (1962) to write that “The travel times of P were ... as much as 12 seconds earlier in the eastern United States than at equivalent distances in the western part...” “The travel times eastward are so different from those westward that the epicenter of GNOME, based on the observed times and using the J-B table, was calculated to be about 30 kilometers to the east of the actual site.” Herrin and Taggart (1962) wrote of GNOME that “For the first time, clear evidence of the existence of significant regional differences in Pn velocities is available. Any computational procedure attempting to use data in the Pn range for the determination of epicenters in the United States must take the resulting differences in travel times into account if significant, systematic errors in the location of the epicenter are to be avoided.” The data quality for this event was very good, with about 100 stations reporting. Herrin and Taggart developed and applied a 3D velocity model for Pn interpretation, integrating along a great circle path to obtain theoretical travel times, and got much better results for the GNOME explosion (location within about 3 km). But approaches based on 3D structural models have not in practice found wide application for routine work. Below, we make the point that an equivalent approach, based on modeling to obtain relevant travel times for each station but combined with empirical travel time data, can do the job.

Despite the many efforts to obtain better velocity models of crust and upper mantle for North America¹, it is still the case that USGS/NEIC uses path-independent travel time curves. In recent years, examples of event mislocation show that the problem apparent for GNOME in 1961 has still not been adequately addressed.

Thus, on 09 December 2003 a pair of events 12 s apart ($M_w \sim 4.3$) in Central Virginia occurred beginning at $T_0 = 20:59:18.7$ (37.774°N 78.100°W $h = 10$ km) as determined by special study (Kim and Chapman, 2004). Their location is confirmed by comparison with the region of strongest intensity on a Community Internet Intensity Map. The event was felt widely, including in the Washington, DC, area; the nearest seismometer may have been in a pair of nuclear reactors at North Anna, “40 miles NW of Richmond, VA”, but these records have not been made available. The weekly PDE/NEIC location is given as 37.587°N 77.903°W and is thus more than 20 km from what appears to be the correct location.

There are other examples, and in each case there are particular issues concerning which stations were operating or not operating. But the bottom line is that PDE event locations have been significantly in error. A principal reason appears to be the problem, well-known but unaddressed for more than four decades (since GNOME), namely the reliance upon path-independent P_n travel times².

Detailed studies of the problem have appeared from time to time, but successful efforts to solve it in the context of routine processing for bulletins of seismicity have developed only in the last seven years. The need for improved estimates of absolute seismic event locations over broad areas, using regional (and teleseismic) signals, became apparent to a new community in the late 1990s when the International Monitoring System (IMS) of the Comprehensive Test Ban Treaty Organization began partial operations. In 1999, at the first of a series of “location calibration workshops” organized in Oslo by Dr. Frode Ringdal under the auspices of the IMS, participants began to sketch a plan in which significant improvement in event location might be achieved. Essentially, the idea was to apply a variety of methods all directed towards obtaining for each station in the network used for event location a set of travel times to that station, for relevant seismic phases, for all candidate source locations. In practice, these travel times were reported as Source Specific Station Corrections (SSSCs) to the iasp91 travel time model (which, for regional P -waves, is essentially the same as model ak135). Thus, for station A and source position X , the travel time from X to A was regarded as the predicted time according to iasp91, plus the SSSC for source X at station A .

Approximately \$10 million was spent during 2000–2003 by the Defense Threat Reduction Agency (DTRA) on contracts (including a major contract to a DTRA Consortium led by Lamont) to provide SSSCs for various subsets of IMS stations, and documentation of claims of location improvement. The Department of Energy is independently supporting an even larger effort.

In practice, SSSCs at a particular IMS station have typically been provided on a $1^\circ \times 1^\circ$ grid centered on the station and going out to about 2000 km, for regional phases P_n and S_n , with most of the effort going into SSSCs for surface sources.

For stations commonly used to locate events in the continental U.S. east of about 110°W longitude, the station density is somewhat greater than for the IMS in East Asia, and S_n waves (and occasionally L_g waves) can be useful. Therefore we anticipate the need to emphasize the use of P_g for at least some stations, to restrict the use of P_n to distances less than 2000 km, and for some stations to use S_n and L_g . We expect such issues will be explored with advice from NEIC personnel.

A number of studies of SSSCs for IMS stations in North America have been carried out, for example by Yang et al. (2001); and by Chun and Vasiliev (2003) for Canadian IMS stations. Yang et al. used only two different sub-regions to represent the whole North American continent: a model (RKSF) originally derived for Fennoscandia was taken to apply to the whole shield/platform of Eastern North America. They did not use 3D ray

¹ For example those based on three sets of chemical explosions in Lake Superior in the 1960s, including Project Early Rise (see Massé, 1973, for a review). Explosion studies of structure are critically reviewed by James and Steinhart (1966). Braile et al. (1989) provide extensive detail with P_n and P_g contour maps. More recently profiles associated with the O-NYNEX refraction experiment (Luetgert et al., 1990) have provided extensive data, useful for model generation and evaluation. For example, see Levin et al. (1995).

² Anecdotally we understand that the NEIC will sometimes avoid using data from particular stations that in practice exhibit large residuals for locations in the likely source area. While this makes sense in the context of studying a particular event for which standard travel times (such as J-B) are thought to be inappropriate, it is not a strategy that makes sense for the long term. The need is to improve upon 1D travel times to enable the use, for purposes of event location, of arrival-time data from *all* stations having clear detections.

tracing, and did not use empirical travel time and kriging. But they were still able to demonstrate significant location improvement when their SSSCs were applied to locate 51 reference events. Thus, their approach was useful as a first start, although it did not use key methods that have emerged and been judged useful within the treaty monitoring community in the last four years.

We submit this proposal to the National/Intermountain West (NIW) panel because our work is in support of improved routine operations at the NEIC.

Proposed work We propose an integrated set of studies, to be carried out over a second year, that effectively will apply the methodology developed by the Lamont Consortium during 2000–2003 for East Asia, to the location of earthquakes in the forty most eastern States of the U.S., together with areas of sparse coverage in Nevada, Arizona, and Idaho that we understand occasionally present problems for event location.

We choose to focus on these 43 States, because the active seismicity in the remaining most western States is studied extensively with regional networks that are relatively dense, allowing crustal P and S waves often to be detected at local stations, so that methods other than the use of SSSCs are more appropriate for event location in those regions.

The integrated five steps we propose to apply for the 43 States region are:

- (1) development of regional velocity models of crust and upper mantle, with their associated travel times, for a few tens of sub-regions of continental North America (this work will begin early in the project with an initial model, and will be refined throughout the first year);
- (2) computation of regional travel times using 3D ray tracing for paths that cross between sub-regions, thus giving SSSCs centered on each station (this work will require a methodological extension from our procedures for East Asia, in order to handle a first order discontinuity at the Moho rather than a region of high gradient, allowing us to compute travel times for P_g and L_g);
- (3) obtaining empirical travel times for stations to be calibrated (or their surrogates), using reference events (sometimes called ground truth events);
- (4) application of kriging methods to empirical travel times (with the model-based 3D travel times as background) to obtain new SSSCs, for a grid of candidate source locations out to several hundred km from each station to be calibrated.
- (5) The final step is the important one of assessing performance of the travel-time model, and overall performance characterized by metrics that assess the extent of location improvement when our kriged SSSCs are used for each station in the network of stations used for event location by the NEIC.

We note that the proposed work is very much a project in applied seismology. Though conceptually it is not particularly sophisticated, it represents a significant challenge as may be immediately recognized because the work has not been done before, even though the need for it was identified more than forty years ago. There are many practical details to be addressed, and the project must be managed in a fashion that is different in a number of ways from the typical scientific research effort supported by NEHRP in an academic setting. A wide variety of skills must be brought to bear in sequence and according to a timetable, in close liaison with NEIC personnel (see section below titled Project Management Plan). We could not think of attempting this project without having had more than three years of experience developing the methods we used successfully to improve the location of East Asian seismicity. Presumably, the reason this type of work has not been done before, is in part because this is a larger project than the typical academic effort engaging one or two people plus a student.

The stations we propose to calibrate include the following 48 USNSN stations: AAM, ACSO, AHID, ANMO, BINY, BLA, BW06, CBKS, CBN, CCM, COR, DUG, DWPF, ELK, EYMN, GOGA, HAWA, HKT, HLID, HRV, HWUT, ISCO, JCT, JFWS, KNB, LBNH, LKWY, LSCT, LTX, MCWV, MIAR, MSO, MYNC, NCB, NEW, NHSC, OXF, PAL, PFO, RSSD, SDCO, SSPA, TPNV, TUC, WCI, WMOK, WUAZ, WVT, plus a number of broadband stations in regional networks, such as PAL, SLM. Though the area for which we propose to achieve improved locations is a part of the U.S., it is likely that stations in Canada and perhaps Mexico can contribute useful data, together with stations in the western U.S. outside our main area of interest. We therefore propose to calibrate (that is, provide SSSCs for) about 60 stations, the final list to be decided in consultation with NEIC personnel. In March 2006, in the first year (which was funded), we began an exchange of information with USGS/NEIC on appropriate station sets to calibrate in this project, by learning which stations have contributed the most phase picks used by NEIC during 2005.

Concerning computation of travel times to obtain model-based SSSCs, we will employ Menke's (2005) Raytrace3d software. Raytrace3d is a freely-available ray-based code that can calculate travel times, locate

earthquakes and perform tomographic inversion in a three-dimensional Earth model. It has been successfully applied previously in our DTRA Consortium work in East Asia, as well as in crustal imaging research (e.g., West et al. 2001; Menke et al. 2002).

A key element of construction of SSSCs is “interpolating” discrete “reference event” travel times into a fully two-dimensional function that represents the travel time from a fixed depth event at an arbitrary (lat, lon) to a given station. We use several conceptually-different methods to accomplish this interpolation, because we have found no single method works best for all stations, given the variability in amount and types of data available for them. One method is based on kriging, and uses only the travel time data plus assumptions about the smoothness of a typical travel-time surface. Another, which employs raytracing, builds a simple, but laterally-varying, Earth model that fits the observed reference travel times and that then can be used to predict travel time at arbitrary locations. This second method is not “travel time inversion” in the ordinary sense. First, the underlying Earth model is very simple. We typically divide the Earth into just a few (10-20) tectonically-distinct regions, with each region having a radially-stratified velocity structure that is represented by just a few parameters. Some of these parameters, like crustal thickness, may be constrained by published geophysical surveys or reflectivity studies. Second, the emphasis is on finding values for the unknown velocity structure parameters so that the travel times from a single station are best-fit (and hence can be well-interpolated). This emphasis is completely different from normal travel-time inversion, where the emphasis is finding a velocity structure that is compatible with travel-time data from all available stations.

Raytrace3d has the basic functionality to facilitate these travel time calculations. It uses tetrahedra with vertices that can lie at arbitrary points, so non-planar interfaces due to the Earth’s sphericity (and ellipticity) or to variable crustal thickness can be well-represented. The Earth’s velocity structure is represented with tetrahedral splines, with provisions being made to identify internal surfaces in the model, such as the Moho, which can act to reflect seismic waves. Velocity inversions can be performed using individual nodal velocities as unknowns and with the velocities of groups of nodes controlled by a single model parameter. The individual node approach leads to inversions with a huge number of unknowns and models with unconstrained variability. It implements tomographic inversion. The grouped nodes approach allows for highly constrained inversions, such as the tectonic regionalization method described above.

Concerning the development of a set of reference events, There are 54 earthquakes that occurred in the eastern U.S. (east of 110° W) since 1990 that have magnitude $mb \geq 4.0$.

Earthquakes in the Continental U.S. since 1990 $mb > 4.0$

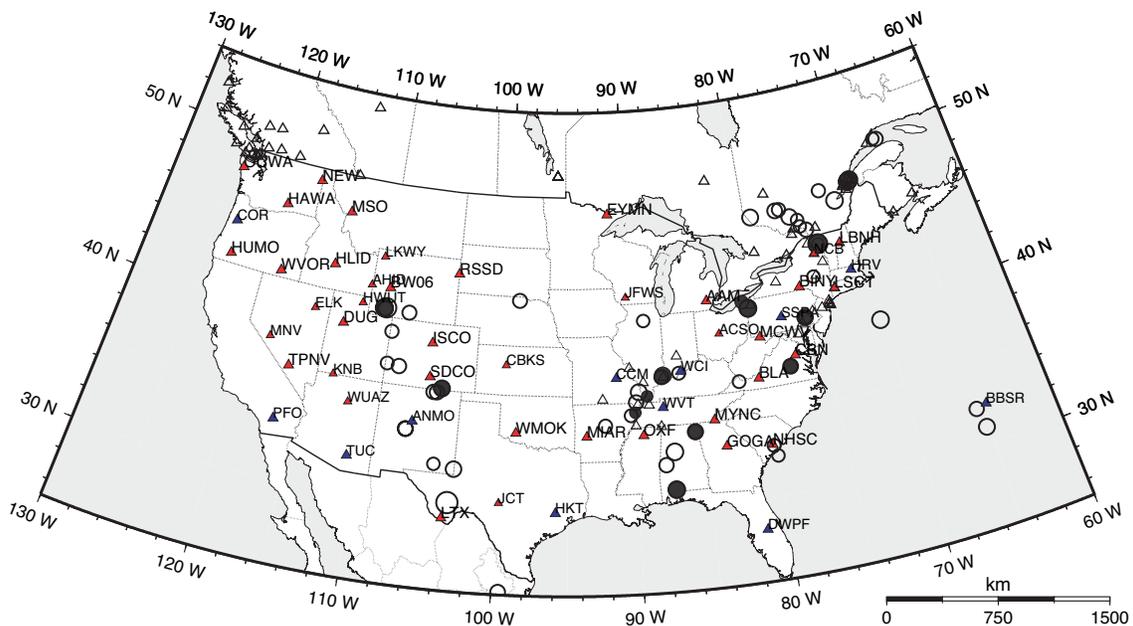


Figure 2. 54 earthquakes in our study region with magnitude greater than or equal to 4, since 1990; many of which (shown shaded) we expect to be suitable as reference events.

These events are large enough and are mostly well enough recorded by USNSN and other permanent stations in the continental U.S. and southern Canada to allow their use as reference events. They are shown in Figure 2, together with the 48 stations listed above (and a number of additional stations).

Additional reference events can be expected from well-recorded earthquakes that occurred earlier than 1990 (see for example Dewey and Kork, 2000). The following list of papers describes the mechanism and accurate location (including focal depth) of events shown in Figure 2, allowing many of them to be used as reference (ground truth) events: Kim and Chapman (2004); Horton et al. (2004); Seeber et al. (1998, 2002, 2004); Kim (2003); Du et al. (2003); and Levin et al. (1995). Reference events will also be obtained from mineblasts (especially in the intermountain west), and from a limited number of underground nuclear explosions (including GNOME, SALMON, GASBUGGY, RULISON).

Date	Time	Lat.	Long.	h	Magnitude		Location
					year-mo-dy	hh:mm:ss	
1995-02-03	15:26:13	41.518	109.808	4	5.1	5	Trona Mine, Wyoming
1997-10-24	08:35:17	31.12	87.34	4	5.1	4.9	Alabama
2000-01-01	11:22:57	46.87	78.90	13	5.1	4.6	Teminskaming, Canada
2000-04-20	08:46:55	43.95	74.25	8	3.9	4.3	Saranac Lank, NY
2001-01-26	03:03:19	41.99	80.83	2	4.2	3.9	Ashtabula, Ohio
2001-05-04	06:42:13	35.18	92.17	5	4.4	4.0	Enola, AR
2001-09-05	10:52:07	37.133	104.506		5.0	4.6	Trinidad, Colorado
2002-04-20	10:50:00	44.51	73.70	11	5.3	5.0	Au Sable Forks, NY
2002-06-05	20:17:37	52.89	74.41	4	4.5	3.8	Northern Quebec
2002-06-18	17:37:13	37.99	87.77	18	5.0	4.6	Caborn, Indiana
2002-11-03	20:41:46	42.81	98.91	8	4.3	3.9	Martin, Nebraska
2002-11-11	23:39:28	32.36	80.07	8	4.2	4.0	South Carolina
2003-04-29	08:59:38	34.54	85.63	13	5.3	4.9	Fort Payne, Alabama
2003-05-25	07:32:33	43.10	101.75	20	4.4	3.9	South Dakota
2003-06-06	12:29:33	36.89	88.99	1	4.5	4.0	Bardwell, Kentucky
2003-12-09	20:59:18.7	37.774	78.100	10	4.5	4.3	Central Virginia

Table 1 16 events (14 since 2000) with accurate locations and moment tensor determinations in our area.

Concerning assessment of performance of our SSSCs, we broadly expect two levels of capability for improved event location. For the whole region (43 States), there will be a first level of improvement derived from the model-based SSSCs. And then in the vicinity of reference events, we expect that kriged SSSCs will provide a second level of improved capability. We shall report capabilities firstly in terms of the residuals for travel times (observed minus calculated), seeing what reductions are attained when SSSCs (both model-based, and kriged) are applied; and secondly in terms of overall location improvement, using metrics derived originally for treaty monitoring (examples of these metrics are given below in Tables 2 and 3, in the section on Related Efforts).

It should be noted that we propose to deliver not only a set of SSSCs and a report on what degree of location improvement they can be expected to provide, but more generally the basic framework for solving the problem first made clearly apparent with the GNOME data of 1961. Thus, in future years as significant numbers of additional reference events become available, updated SSSCs can be provided with little additional effort because the framework can handle revisions easily. It can even handle additional stations, which at first could be provided with their own model-based SSSCs that subsequently would be kriged to the extent that empirical data from reference events become available for that station.

Progress to Date

In May 2005 we submitted a proposal to carry out this work over a period of two years. In late 2005 we learned that we would receive funding for the first year, and on this basis in early 2006 the five scientists involved at Lamont (Kim, Menke, Richards, Schaff, Waldhauser) began to work together. During the first few months our principal effort has been the successful adaptation of Menke's code, Raytrace3d, to the scale of the problem of modeling regional travel times for P_g , P_n , and teleseismic P for sources and stations within North America.

In particular, for the region between 23°N to 50°N and 60°W to 125°W, which includes Bermuda (see Fig.

2), and extending down 1000 km from the Earth's surface, this code has been applied to 600,000 tetrahedral cells that currently are used, first, in a check to see how well the known travel times of the specified ak135 Earth model can be reproduced; and second, to establish the adaptation to an elliptical Earth model version of ak135 with station locations and source locations specified with geographic rather than geocentric latitudes. The precision of ak135 travel times obtained with this code is much less (i.e. much better) than the effects of ellipticity, which we can accommodate routinely though of course it has a smaller effect on travel times than the path corrections which are our main interest. Taking the lateral spacing of nodes as 0.25° brings the number of cells up to about two million, and presents no difficulty. With the Beowulf Linux cluster at Lamont we can go up to about ten million cells.

We are assembling travel-time data sets associated with particular events of known location and origin time (nuclear explosions in the continental United States outside the Nevada Test Site) to provide constraints on the regional models we are beginning to assess.

We have begun communication with NEIC personnel to obtain advice and information pertinent to two important issues: the selection of the set of stations to be calibrated; and the formats in which our results can best be presented to make them useful in NEIC operations.

Final Report and Dissemination

Our final technical report will primarily be addressed to NEIC personnel. It will contain a description of our methods; files of hypocenter parameters for reference events; empirical travel time data for reference events; empirical travel time data for reference events observed at stations to be calibrated; SSSCs for these stations on a $1^\circ \times 1^\circ$ grid for Pn - and Sn -waves and on a finer grid as needed for Pg -waves; an assessment of travel time residuals (of the type shown below as Table 2 for East Asia) for reference events, with and without SSSCs; and summary metrics (of the type shown in Table 3) that characterize the end-to-end degree of location improvement we achieve when our SSSCs are applied to the 40 most eastern States of the United States plus parts of Idaho, Arizona, and Nevada (and possibly Montana).

We expect to deliver not just a set of SSSCs that will enable locations with improved accuracy, but a framework that can be expected to support subsequent improvements in event location as new stations and new reference events become available.

We also expect to submit for publication in the Bulletin of the Seismological Society of America a scientific paper summarizing our methods and our practical results.

We expect to visit and consult regularly with NEIC personnel, in their Golden, CO, headquarters, or at Lamont; and to submit progress reports as appropriate.

Related Efforts

Because the seismicity of the 43 States to be studied in this proposal is for the most part quite low, it will be necessary to work largely within the framework of locating events one-at-a-time using conventional phase picks. Other projects on event location, ongoing at Lamont (see Current & Pending), include major projects to improve locations using multiple event location methods, often using relative arrival times measured from waveforms by cross-correlation (WCC). Some of these other studies can be expected to contribute to the work proposed here, to the extent that WCC methods can be used to establish good reference events (for example in the New Madrid region).

For the last three years, Richards has co-chaired with Dr. E.R. Engdahl a IASPEI Working Group on Reference Events for Improved Locations for the Commission on Seismological Observation and Interpretation. This effort is related to the present proposal. The Working Group is expected to continue for a number of years, gathering information (to be archived by the International Seismological Centre) on seismic events whose location is accurately known.

In March 2004, Paul Richards contacted Dr. Jim Dewey of NEIC to inquire on the possibility of a Lamont/NEIC collaboration in a project to apply the SSSC methodology (developed in 2000 – 2003 by the Lamont Consortium for East Asia), to achieve significant improvement in earthquake locations in the eastern, central and intermountain west regions of the United States. Dr. Dewey consulted with his colleagues in NEIC, and by e-mail on March 16 responded affirmatively, stating that it would be appropriate to list him as a collaborator. He went on to say "If the hypocenters from your methodology are a significant improvement over what we are obtaining with the methodology we are using at that time, the implementation of the process would then involve your working with someone who is actually writing code for NEIC operations." In April 2005, Won-Young Kim and Richards discussed this project further with Dr. Harley Benz and Dewey, and it is our

understanding that this project is deemed relevant by NEIC personnel. The use of SSSCs would appear to us to be by far the most effective approach to making allowance for 3D structure in the interpretation of arrival times, because this method so directly summarizes the necessary travel-time information. Our approach based on SSSCs could not have been applied under the legacy procedures used so long by NEIC and based on VAX hardware, but we understand that our approach can be incorporated into recently developed software at the NEIC and we at Lamont are willing to work with NEIC personnel to accomplish this, applying a framework in which SSSCs are invoked by software to generate travel times from candidate hypocenters to specific stations. Iteration on such hypocenters requires repeated use of interpolated SSSCs.

We shall welcome input from NEIC at all key phases of the project, beginning with decisions on stations to be calibrated, choices to be made on regionalization, and specialized knowledge on such details (for particular stations) as where the crossover distances are between Pn - and Pg -waves, and the utility of Sn phases (and possibly Lg) for event location in particular source regions. We shall very much appreciate being able to incorporate expert information (ad hoc for each station) into our SSSCs for this project, noting that for our East Asia project for the International Monitoring System, we had no opportunities to interact with analysts.

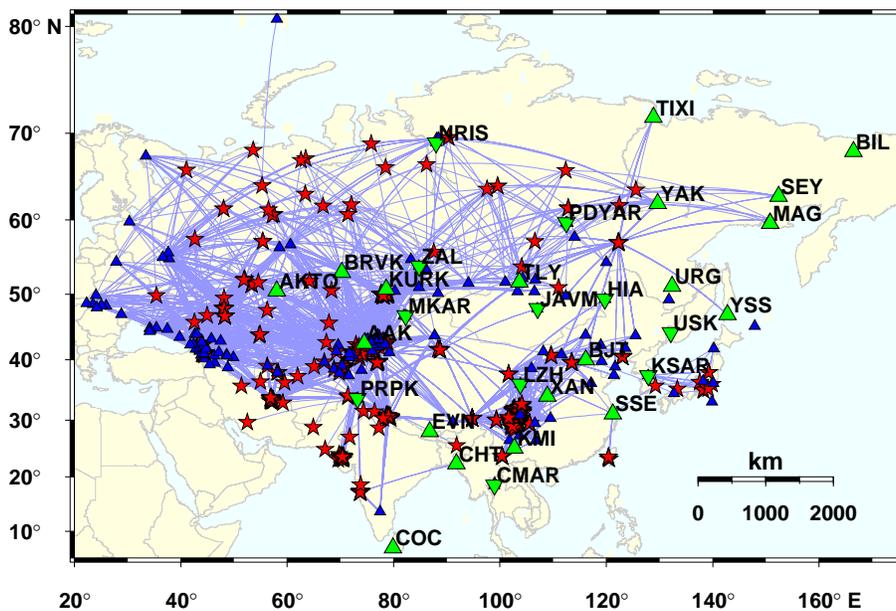


Figure 3. Map of events (red stars) and recording seismic stations (blue triangles) of the data set used for model validation. The green triangles represent the 30 IMS stations that the Lamont Consortium contracted to calibrate. Also shown are great circle Pn paths between events and stations.

In our DTRA-funded project to improve the location of seismic events in East Asia, we calibrated 127 stations including 30 IMS stations. We used 36 sub-regions to build a 3D velocity model and associated model-based SSSCs, and developed datasets based upon 525 reference (ground truth) events to obtain kriged SSSCs (both Pn and Sn). Figure 3 shows stations, reference events, and Pn paths.

The SSSCs were initially computed by the method of Bondár (1999), using regionalized 1D travel-time curves established after extensive review of published studies including many from the Russian literature. Subsequently we developed a 3D model of the P -wave velocity for East Asia (36 different regions, each with velocity as a function of depth), and used 3D ray tracing in the latter model to compute SSSCs. These model-based SSSCs were refined empirically by applying a kriging algorithm to travel-time residuals for reference/ground-truth (GT) events. Off-line validation tests were performed by evaluating travel-time residuals and by relocating GT events, with and without using SSSCs. To test the validity of the model directly, relocation tests were first performed using model-based SSSCs without kriging. Tests were then performed to evaluate the kriged SSSCs, using a leave-one-out approach so that events were not simultaneously used to both compute and test the SSSCs.

Nuclear explosions dominated our ground-truth datasets in the first two years of this project. In particular

we used source parameters for Soviet-era Peaceful Nuclear Explosions (PNEs). But this approach, while quite satisfactory for calibrating stations in much of Russia and Central Asia (which made up approximately half the IMS stations we studied) could not be extended to the remaining stations, for which it was necessary to develop GT information on significant numbers of earthquakes. By use of the double-difference method and detailed fault maps, we obtained 64 GT5 (ground truth known to within 5 km) earthquakes by re-analyzing the Annual Bulletin of Chinese Earthquakes (ABCE) for a 15-year period (1985 to 1999). It contains phase picks for approximately 1000 earthquakes in and near China, each year. [As part of this work we conducted a preliminary examination of digital waveforms for about 14,000 events, in and near China, which showed that approximately 9% of them (1301 events) have the property that any one event has almost the same Lg waveform as at least one other event. These events are grouped into 494 sets of events, each of which has essentially the same short-period waveform and thus the events of each set must be within about 1 km of each other. These event sets provide a good method for assessing the quality of standard event catalogs. When combined with other information, they can provide high-quality absolute locations. Schaff and Richards had a paper in SCIENCE on this subject in February 2004.]

Case	IASP91		Model-Based SSSCs		Model + Kriged SSSCs	
	$\mu_{\Delta T}(s)$	$\sigma_{\Delta T}(s)$	$\mu_{\Delta T}(s)$	$\sigma_{\Delta T}(s)$	$\mu_{\Delta T}(s)$	$\sigma_{\Delta T}(s)$
Pn	1.89	1.77	1.33	1.48	0.22	1.01
Sn	6.08	4.24	3.08	3.76	1.34	3.76

Table 2. Mean and standard deviation of travel time residuals, for all stations calibrated in East Asia by the Lamont Consortium that recorded 3 or more reference events. Note the very significant reduction in mean and standard deviation, obtained by kriging.

As an overall indication of how well our SSSCs reduced the misfit between observed and calculated arrival times, Table 2 shows RMS values for the mean and standard deviation of the Pn and Sn travel-time residuals for all the stations that recorded at least 3 GT events. The kriged results were obtained via a leave-one-out approach in the generation of SSSCs, so that the arrival times from any one event were not used to provide the location estimate in that case. From this Table, we see that a very significant reduction of residuals was obtained by kriging.

Using Pn and Sn arrival times for our GT data sets, we relocated 525 events recorded by various combinations of 140 regional stations. Mislocations in East Asia were reduced for 66% of the events using the model-based SSSCs, and for 85% of the events using model-based SSSCs refined by kriging. In Table 3 we summarize the main location performance metrics when Pn and Sn arrivals were used with and without SSSCs. Extensive documentation is available (a 281-page technical report, and a CD with all supporting data).

Case	IASP91	Model-Based SSSCs	Model + Kriged SSSCs
Median mislocation (km)	16.9	11.4	6.5
Events with reduced mislocation		66%	85%
Median error ellipse area (km ²)	2,616	1,663	722
Events with smaller ellipses		99%	100%
90% coverage	89%	91%	92%

Table 3. Location performance metrics achieved by the Lamont Consortium for event location in East Asia using *Pn* and *Sn*. Note the significant reduction in mislocation, and in area of confidence ellipses, while retaining the property that the error ellipse contains the event ~90% of the time.

References

- Braile, L. W., W. J. Hinze, R. R. B. von Frese, and R. G. Keller, Seismic properties of the crust and uppermost mantle of the conterminous United States and adjacent Canada, *Geol. Soc. Am. Mem.*, **172**, 655–680, 1989
- Chun, K.-Y., and N. Vasiliev, Pn source specific station corrections for IMS stations in Canada, Technical report for Sept 1, 2002 – Feb 28, 2003, prepared for the Geological Survey of Canada, 2003.
- Dewey, J., and J. Kork, Selection of earthquakes for calibration events in the United States, in *Proceedings of the 2nd Workshop on Location Calibration*, Oslo, Norway, March 20–24, 2000.
- Du, Wen-xuan, Won-Young Kim and Lynn R. Sykes, Earthquake source parameters and state of stress for the Northeastern United States and Southeastern Canada from analysis of regional seismograms, *Bull. Seism. Soc. Amer.*, **93**, 1633–1648, 2003.
- Herrin, E., Regional variations of P-wave velocity in the upper mantle beneath North America, in *The Earth's Crust and Upper Mantle*, Geophys. Monograph 13, ed. P.J. Hart, pp. 242–246, American Geophysical Union, Washington, D.C., 1969.
- Herrin, E., and J. Taggart, Regional variations in Pn velocity and their effect on the location of epicenters, *Bull. Seism. Soc. Amer.*, **52**, 1037–1046, 1962.
- Horton, S., Won-Young Kim and M. Withers, The 6 June 2003 Bardwell, Kentucky earthquake sequence: Evidence for a locally perturbed stress field in the Mississippi Embayment, submitted to *Bull. Seism. Soc. Amer.*, February 2004.
- James, D.E., and J. S. Steinhardt, Structure beneath continents: A critical review of explosion studies, 1960--1965, in *The Earth beneath the Continents*, Geophys. Monograph 10, ed. J.S. Steinhardt and T. J. Smith, pp. 293--333, American Geophysical Union, Washington, D.C., 1966.
- Kim, W.-Y., and M. Chapman, The 9 December, Mw 4.3 Central Virginia, earthquake: a complex event in the Central Virginia Seismic Zone, preprint, April 2004.
- Kim, W.-Y., The 18 June 2002 Caborn, Indiana, earthquake: reactivation of ancient rift in the Wabash Valley seismic zone, *Bull. Seism. Soc. Amer.*, **93**, 2201–2211, 2003.
- Levin, V., W.-Y. Kim, and W. Menke, Seismic velocities in the shallow crust of western New England and northern New York, *Bull. Seism. Soc. Amer.*, **85**, 207–219, 1995.
- Luetgert, J., S. Hughes, J. Cipar, S. Mangino, D. Forsyth, and I. Asudeh, Data report for O-NYNEX: the 1988 Grenville-Appalachian seismic refraction experiment in Ontario, New York, and New England, U.S. G. S. Open File Report 90–426, 1990.
- Massé, R. P., Compressional velocity distribution beneath Central and Eastern North America, *Bull. Seism. Soc. Amer.*, **63**, 911–935, 1973.

- Menke, W., Case studies of seismic tomography and earthquake location in a regional context, in *Seismic Data Analysis and Imaging With Global and Local Arrays*, Alan Levander and Guust Nolet, Eds., American Geophysical Union, in press 2005. Preprint available at www.ideo.columbia.edu/users/menke/R3DPAPER/
- Menke, W., M. West and M. Tolstoy, Shallow crustal magma chamber beneath the axial high of the Coaxial Segment of Juan de Fuca Ridge at the "Source Site" of the 1993 eruption, *Geology* **30**, 359-362, 2002.
- Richards, P.G., and twelve other authors, Seismic Location Calibration For 30 International Monitoring System Stations In Eastern Asia: Final Results, in *Proceedings of the 25th Seismic research Review*, Tucson, AZ, 2003a.
- Richards, P.G. and thirteen other authors, Development and Validation Testing of a Regionalized Travel-Time Model, and Source-Specific Station Corrections for Thirty IMS Stations and Other Stations in East Asia, Final Report on DTRA01-00-C-0031, 281 pages, August 2003b.
- Romney, C., B.G. Brooks, R. H. Mansfield, D. S. Carder, J. N. Jordan, and D. W. Gordon, Travel time and amplitudes of principal body phases recorded from GNOME, *Bull. Seism. Soc. Amer.*, **52**, 1057–1074, 1962.
- Seeber, L., J.G. Armbruster, W.-Y. Kim, N. Barstow and C. Scharnberger, The 1994 Cacoosing Valley earthquakes near Reading, Pennsylvania: A shallow rupture triggered by quarry unloading, *J. Geophys. Res.*, **103**, 24505–24521, 1998.
- Seeber, L., W.-Y. Kim, J. G. Armbruster, W.-X. Du, A. Lerner-Lam, and P. Friberg, The 20 April 2002 Mw 5.0 earthquake near Au Sable Forks, Adirondacks, New York: A first glance at a new sequence, *Seism. Res. Lett.*, **73**, 480–489, 2002.
- Seeber, L., J. Armbruster and W.-Y. Kim, A fluid-injection triggered sequence in Ashtabula, OH: Implication for seismogenesis in stable continental regions, *Bull. Seism. Soc. Amer.*, **94**, 76–87, 2004.
- West, M., W. Menke, M. Tolstoy, S. Webb and R. Sohn, Magma storage beneath Axial volcano on the Juan de Fuca mid-ocean ridge, *Nature* **25**, 833–837, 2001.
- Yang, X., I. Bondár, K. McLaughlin, R. North, and W. Nagy, Path-dependent phase travel-time corrections for the International Monitoring System in North America, *Bull. Seism. Soc. Amer.*, **91**, 1831–1850, 2001.

Project personnel and bibliography of directly related work

CURRICULUM VITAE:

PAUL G. RICHARDS

- 1965 B.A. (Mathematics), University of Cambridge
- 1966 M.S. (Geology) California Institute of Technology
- 1970 Ph.D. (Geophysics), California Institute of Technology
- 1987 - present Mellon Prof. of Nat. Sciences, Columbia Univ.
- 1985 - present Member, AFTAC Seismic Review Panel,
- 2000 – present Member, NAS panel on Technical Issues associated with CTBT Ratification

Relevant Publications

- Keiiti Aki & Paul G. Richards, *Quantitative Seismology*, second edition, one volume, University Science Books, 2002 (Japanese edition, 2004).
- Waldhauser, Felix, and Paul G. Richards, Reference events for regional phases at IMS stations in China, *Bulletin of the Seismological Society of America*, **94**, 2265--2279, December 2004.
- Schaff, David P., and Paul G. Richards, Lg-wave cross correlation and double-difference location: application to the 1999 Xiuyan, China, sequence, *Bulletin of the Seismological Society of America*, **94**, 867--879, 2004.
- Yang, Zhi-xian, Felix Waldhauser, Yun-tai Chen, and Paul G. Richards, Relocation of earthquakes in central-western China using the double-difference earthquake location algorithm, accepted for publication, *Journal of Seismology*, 2004
- Schaff, David P., and Paul G. Richards, Repeating seismic events in China, *SCIENCE*, **303**, 1176–1178, 2004.
- Valeriu Burlacu, Mark Fisk, John Armbruster, Vitaly I. Khalurin, Won-Young Kim, Paul G. Richards, David P. Schaff, Felix Waldhauser, Michael West, Igor Morozov, Elena Morozova, Vernon Cormier, Anastasia Stroujkova, and Chandan Saikia, Development and Validation Testing of a Regionalized Travel-Time Model, and Source-Specific Station Corrections for Thirty IMS Stations and Other Stations in East Asia, Final Report on DTRA01-00-C-0031, 281 pages, August 2003.

CURRICULUM VITAE:

WON-YOUNG KIM

Education:

1986 Ph.D. (Seismology), Faculty of Science, Uppsala University; 1980 Diploma di Perfezionamento in Fisica (Geophysics), University of Trieste, Italy; 1977 M. S. (Geophysics), Yonsei University, Seoul, Korea; 1973 B. S. (Geology), Yonsei University, Seoul, Korea

Appointments:

2004 present Doherty Senior Research Scientist, LDEO, Columbia University.
 1997 -2003 Doherty Research Scientist, Lamont-Doherty Earth Observatory of Columbia University.
 1989 -1997 Associate Research Scientist, Lamont-Doherty Earth Observatory.
 1988 -1989 Post-Doctoral Fellow in Geology, Harvard University.
 1986-1988 Researcher, University of Uppsala, Sweden.

Professional Service:

Member of the IASPEI (International Association of Seismology and Physics of Earth's Interior)
 Working Group on magnitudes, WG chaired by James W. Dewey of USGS.
 Advanced National Seismic System (ANSS) - member of the ANSS-NE Regional Working Group. Member, ANSS Working Group A on National Performance Standard.

Related Recent Publications: (in the last five years)

Shi, Jinghua, Paul G. Richards and W. Y. Kim, Determination of seismic energy from Lg waves, *Bull. Seism. Soc. Am.* **90**, 483-493, 2000.
 Kim, Won-Young, L.R. Sykes, J.H. Armitage, J.K. Xie, K.H. Jacob, P.G. Richards, M. West, F. Waldhauser, J. Armbruster, L. Seeber, W.X. Du and A. Lerner-Lam, Seismic waves generated by aircraft impacts and building collapses at World Trade Center, New York City, *EOS, Transactions of the American Geophysical Union* **82**, 565-571, Nov. 20, 2001.
 Seeber, L., W.-Y. Kim, J. Armbruster, W-X Du and A. Lerner-Lam, The 20 April 2002 Mw 5.0 earthquake near Au Sable Forks, Adirondacks, New York: A first glance at a new sequence, *Seism. Res. Lett.*, **73**, 480-489, 2002.
 Du, Wen-xuan, Won-Young Kim, and Lynn R. Sykes, Earthquake source parameters and state of stress for northeastern United States and southeastern Canada from analysis of regional seismograms, *Bull. Seism. Soc. Am.* **93**, 1633-1648, 2003..
 Kim, Won-Young, June 18, 2002, Evansville, Indiana earthquake: Reactivation of ancient rift in the Wabash Valley seismic zone?, *Bull. Seism. Soc. Am.* **93**, 2201-2211, 2003.
 Seeber, L., J. Armbruster and W.Y. Kim, A fluid-injection triggered sequence in Ashtabula, OH: Implication for seismogenesis in stable continental regions, *Bull. Seism. Soc. Am.* **94**, 76-87, 2004.
 Horton, S., Won-Young Kim and M. Withers, The 6 June 2003 Bardwell, Kentucky earthquake sequence: Evidence for a locally perturbed stress field in the Mississippi Embayment, *Bull. Seism. Soc. Am.* **95**, 431-445, 2005.
 Kim, Won-Young and M. Chapman, The 9 December 2003, Mw 4.3 central Virginiam earthquake: A Complex event in the central Virginia seismic zone, *Bull. Seism. Soc. Am.* **95**, 2428-2445, 2005.

Graduate Students Advised at Columbia Univ., total 7:

Wen-xuan Du (1997-2002), John Granville (1998-), Duan Chang (1998-2001), Jinghua Shi (1992 -1998), Jianping Xu (1995-1997), Vigen Aharonian (1993-1994), Vadim Levin (1991-1993).

Synergistic Activities:

PI, Lamont-Doherty Cooperative Seismographic Network (LCSN; 1992-present)
 PI, Installation and operation of 8 broadband seismographic stations in Kazakstan (1994-2001).

CURRICULUM VITAE:

WILLIAM MENKE

Professional Preparation

Massachusetts Inst. of Technology	Earth and Planetary Science	BS, MS 1976
Columbia University	Geological Sciences	M.Phil 1978, PhD 1982

Appointments

Chairman	Dept. Earth & Env. Sci., Columbia U.	2002-2004
Associate Chairman	Dept. Earth & Env. Sci., Columbia U	2000-2002
Professor	Columbia University	1992-
Associate Director	Lamont-Doherty Earth Obs.	1989-1992
Associate Professor	Columbia University	1986-1992

Relevant Publications

- Menke, W., Case studies of seismic tomography and earthquake location in a regional context, in *Seismic Earth: Array Analysis of Broadband Seismograms*, Alan Levander and Guust Nolet, Eds., Geophysical Monograph Series 157. American Geophysical Union, 7-36, 2005.
- Menke, W. and D. Schaff, Absolute earthquake locations with differential data, *Bull. Seism. Soc. Am.* 94, 2254-2264, 2004.
- Menke, W., Using waveform similarity to constrain earthquake location, *Bull. Seism. Soc. Am.* 89, 1143-1146, 1999.
- Menke, W. and V. Levin: A strategy to rapidly determine the magnitude of great earthquakes, *EOS Trans. AGU* 86, 185-189, 2005.
- Menke, W., A. Lerner-Lam and R. Mithal, Spatial coherence of 5-25 Hz seismic wavefields at a hard rock site, *Structural Safety* 10, 163-179, 1991.

Other Publications

- Menke, W., M. West and M. Tolstoy, Shallow crustal magma chamber beneath the axial high of the Coaxial Segment of Juan de Fuca Ridge at the "Source Site" of the 1993 eruption, *Geology* 30, 359-362, 2002.
- Menke, W. and V. Levin, The Cross-Convolution Method for Interpreting SKS Splitting Observations, with Application to One and Two Layer Anisotropic Earth Models, in *Geophys. J. Int* 15, 379-392, 2003.
- West, M., W. Menke, M. Tolstoy, S. Webb and R. Sohn, Magma storage beneath Axial volcano on the Juan de Fuca mid-ocean ridge, *Nature* 25, 833-837, 2001.
- Menke, W., *Geophysical Data Analysis: Discrete Inverse Theory*, Revised Edition (textbook), Academic Press, Inc., New York, 1989.
- Menke, W. and D. Abbott, *Geophysical Theory* (Textbook), Columbia University Press, 458p, 1989.

Synergistic Activities

- Seismological Field Experiments: SIST (Iceland), ONYNEX (NY-New England), Katla Volcano (Iceland), Krafla Volcano (Iceland), Baradalur '96 (Iceland), Grinsfjall Volcano (Iceland) '98, Axial Volcano (Juan de Fuca Ridge, 1999).
- IRIS/PASSCAL Standing Committee, 1996-1997
- Development of 3-semester "The Earth System" undergraduate course at Columbia University, 1994-1996.
- Ridge Multibeam Synthesis Project and associated database, 1995.

Collaborators B. Brandsdottir (U. Iceland), P. Einarsson (U. Iceland), V. Levin (Rutgers), J. Park (Yale),

Graduate Advisors A. Brecher (Undergraduate), P. Molnar (Masters), P. Richards (PhD)

Advisor and Sponsor V. Levin (Rutgers U), M. West (U. Alaska, Fairbanks), C. Rodriguez (Columbia U). Total 8

CURRICULUM VITAE:**FELIX WALDHAUSER****Experience**

- | | |
|---|-------------------|
| Associate Research Scientist
<i>Lamont-Doherty Earth Observatory, Columbia University, Palisades, New York</i> | 05/2001 - present |
| Visiting Scientist
<i>Swiss Federal Institute of Technology (ETH) (one month), Zurich, Switzerland</i> | 01/2001 - 04/2001 |
| Visiting Scholar, Research Scientist
<i>Geological Survey of Canada (three months), Sidney, BC, and Ottawa, Canada</i> | 01/1999 - 11/2000 |
| Postdoctoral Fellow
<i>Stanford University, Stanford, California</i> | 11/1997 - 05/2000 |
| Postdoctoral Research Scientist
<i>U.S. Geological Survey, Menlo Park, California</i> | 01/1997 - 10/1997 |
| Research & Teaching Assistant
<i>Swiss Federal Institute of Technology (ETH), Zurich, Switzerland</i> | 05/1993 - 12/1996 |

Education

- | | |
|--|------|
| PH.D. IN GEOPHYSICS
<i>Swiss Federal Institute of Technology (ETH), Zurich, Switzerland</i> | 1996 |
|--|------|

Fellowships

Graduate fellowship from the Kanton of Basel, Switzerland and ETH-Zurich	1993-1996
Swiss National Science Foundation Postdoctoral Fellowship	1998

Related Publications

- Schaff, D.P. and F. Waldhauser, Waveform Cross-Correlation-Based Differential Travel-Time Measurements at the Northern California Seismic Network, *Bull. Seism. Soc. Am.*, 95, 2446-2461, 2005.
- Waldhauser, F., W. L. Ellsworth, D. P. Schaff, and A. Cole, Streaks, multiplets, and holes: High-resolution spatio-temporal behavior of Parkfield seismicity, *Geophys. Res. Lett.*, 31, L18608, doi:10.1029/2004GL020649, 2004.
- Schaff, D. P., G.H.R. Bokelmann, W.L. Ellsworth, E. Zankerka, F. Waldhauser, and G. C. Beroza, Optimizing correlation techniques for improved earthquake location, *Bull. Seism. Soc. Am.*, 94, 705-721, 2004.
- Waldhauser, F. and W. L. Ellsworth, Fault structure and mechanics of the Hayward Fault, California, from double-difference earthquake locations, *J. Geophys. Res.*, 107(B3), 2054, doi:10.1029/2000JB000084, 2002.
- Waldhauser, F. and W. L. Ellsworth, A double-difference earthquake location algorithm: Method and application to the northern Hayward fault, *Bull. Seism. Soc. Am.*, 90, 1353-1368, 2000.
- Waldhauser, F., D. P. Schaff, P.G. Richards, & W.-Y. Kim, Lop Nor revisited: nuclear explosion locations, 1976-1996, from double-difference analysis of regional and teleseismic data, *Bull. Seism. Soc. Am.*, 94, 1879-1889, 2004.

CURRICULUM VITAE:**DAVID SCHAFF****Education**

1994 – 2001	Stanford University	
Ph.D.	Geophysics	Advisor: Greg Beroza
1990 – 1994	Northwestern University	
B.A.	4 majors: ISP, Geology, Physics, Math	Advisor: Emile Okal

Honors and Awards

Boy Scout Eagle Award
 National Merit Scholar
 Sigma Pi Sigma – college physics honor society
 Sigma Xi

Research Experience

1990 - 1994	B.A., Northwestern University
1994 - 2001	Ph.D. (Geophysics), Stanford University
1993 - 1994	Research Assistant, Geology, Northwestern University
1994 - 2001	Research Assistant, Geophysics, Stanford University
2001 - 2004	Postdoctoral Research Scientist, Columbia University
2004 - present	Doherty Associate Research Scientists at Lamont-Doherty Earth Observatory

Related Publications

- Richards, P.G., F. Waldhauser, **D.P. Schaff**, and W.-Y. Kim, The applicability of modern methods of earthquake location, *Pure and Applied Geophys.*, 163, 351-372, 2006.
- Schaff, D.P.**, and F. Waldhauser, Waveform cross-correlation-based differential travel-time measurements at the Northern California Seismic Network, *Bull. Seismol. Soc. Am.*, 95, 2446-2461, doi:10.1785/0120040221, 2005.
- Schaff, D.P.** and G.C. Beroza, Coseismic and postseismic velocity changes measured by repeating earthquakes, *J. Geophys. Res.*, 109, B10302, doi:10.1029/2004JB003011, 2004.
- Waldhauser, F., W.L. Ellsworth, **D.P. Schaff**, A. Cole, Streaks, multiplets, and holes: high-resolution spatio-temporal behavior of Parkfield seismicity, *Geophys. Res. Lett.*, 31, L18608, doi:10.1029/2004GL020649, 2004.
- Menke, W., and **D.P. Schaff**, Absolute earthquake location with differential data, *Bull. Seismol. Soc. Am.*, 94,

2254-2264, 2004.

- Waldhauser, F., and **D.P. Schaff**, Lop Nor revisited: underground nuclear explosion locations, 1976-1996, from double-difference analysis of regional and teleseismic data, *Bull. Seismol. Soc. Am.*, *94*, 1879-1889, 2004.
- Schaff, D.P.**, and P.G. Richards, Repeating seismic events in China, *Science*, *303*, 1176-1178, 2004.
- Schaff, D.P.**, and P.G. Richards, Lg-wave cross correlation and double difference location: application to the 1999 Xiuyan, China, sequence, *Bull. Seismol. Soc. Am.*, *94*, 867-879, 2004.
- Schaff, D.P.**, G.H.R. Bokelmann, W.L. Ellsworth, E. Zankerka, F. Waldhauser, and G.C. Beroza, Optimizing correlation techniques for improved earthquake location, *Bull. Seismol. Soc. Am.*, *94*, 705-721, 2004
- Schaff, D.P.**, F. Waldhauser, G.H. Bokelmann, G.C. Beroza, and W.L. Ellsworth, High resolution image of Calaveras Fault seismicity, *J. Geophys. Res.*, *107*(B9), 2186, doi:10.1029/2001JB000633, 2002..
- Schaff, D.P.**, 4D high resolution seismology: repeating events and large scale relocation, *Ph.D. Thesis*, Stanford University, 115 pp., 2001.
- Schaff, D.P.**, G.C. Beroza, and B.E. Shaw, Postseismic response of repeating aftershocks, *Geophys. Res. Lett.*, *25*, 4549-4552, 1998.

Institutional qualifications

This proposed research will be carried out within the Seismology, Geology, and Tectonophysics group at the Lamont-Doherty Earth Observatory of Columbia University, which has conducted research for several decades in almost all facets of seismology, including hazard reduction.

All the scientists involved in this work have access to a network of high-performance Sun workstations, including four Blade 100s, each with 2GB of RAM, and one Ultra 80. All software needed for the proposed research is available to the researchers. They also have access to a 32-node Linux cluster with 64 processors (1.2 GHz Athons) having 1 GB RAM per node.

The scientists involved in this work have access to excellent library facilities. At no cost to the project, they will also be able to draw upon the experience of colleagues at Lamont, including Lynn Sykes, Klaus Jacob (both retired, but still active), plus Nano Seeber, Jim Gaherty, Art Lerner-Lam, Göran Ekström and Meredith Nettles, all of whom have considerable expertise in earthquake location and/or studies of shallow Earth structure.

Project management plan

The proposed work will engage five scientists at Lamont, who bring very different skills to the project. Bill Menke will lead in the practical work of travel time computation for regional seismic waves in 3D crust/mantle structures. Felix Waldhauser will lead in earthquake relocation efforts, needed as part of the work of accumulating reference events (which will entail relocation of event clusters) as well as in the work of validation of our claims of location improvement. David Schaff will take overall responsibility for data management and evaluation, so that at any give stage it is clear to all participants what is the current 3D model we are working with (and its associated travel times), what reference events we have accumulated (and the empirical data associated with them) and what capability we have achieved (in terms of reduced travel time residuals, and location improvements). Won-Young Kim will take the lead in data acquisition and waveform analysis as needed (travel time data and waveforms for reference events, establishing event depth and relative location of aftershocks). Paul Richards will take overall responsibility for project management, coordinating different elements of the work, interactions with NEIC personnel, writing reports, and communicating results in different forums.

We have included travel for two people from Lamont each year to work for four days at NEIC, there to facilitate identification of practical problems and their best practical solutions. We shall also welcome any visits of NEIC personnel to Lamont to participate in ongoing discussion of practical problems and their resolution.

Next, we give a plan for this two-year project for which the first year of funding has recently been awarded, recognizing that at this time of writing we are only a few months into the first year of work, most of which will be done in the summer of 2006. Thus, we identify the following steps, each associated with the names of one or more key personnel at Lamont:

YEAR 1

By early summer 2006: Consult with NEIC personnel and agree on the list of stations to be calibrated in this project. A tentative list is included in the proposal text and is discussed above. [Richards, Kim]

Throughout this first year, and to be finalized after 12 months: Consult with NEIC personnel on the list of suitable

reference events. See Figure 2 for candidates, which we expect can be augmented by large mineblasts in the intermountain west, and by well-recorded earthquakes earlier than 1990. [Richards, Kim]

Throughout this first year, and to be finalized after 12 months: Acquire hypocentral information and empirical travel times for reference events. Incorporate travel time information from explosion studies (Project Early Rise, O-NYNEX). [Kim, Schaff]

By mid-summer 2006: Consult with NEIC personnel and others, to define an initial regionalization of the 40 most eastern states of the United States (sub-region boundaries, crustal/upper mantle P and S velocities in each sub-region), and also to agree on one or two depths (?5 km and 15km?) for which SSSCs will be obtained. [Menke, Waldhauser, Kim]

Throughout this first year, and to be finalized after 12 months: Adapt 3D raytracing software to our specific needs, to enable computation of model-based SSSCs for P_g , P_n , S_n , L_g (S_g). [Menke]

Throughout this first year, and to be finalized after 12 months: Begin comparison between model-based SSSCs and empirical travel-time data from reference events. [Menke, Schaff, Waldhauser, Kim]

Last 3 months of year 1: Refine regionalization as appropriate, to fit explosion datasets and (if possible) other reference event datasets, especially to identify cross-over distances (where P_g and P_n cross over as first arrivals). [Menke, Kim]

YEAR 2

First 2 months: Obtain kriged SSSCs. [Kim, Menke]

First 6 months: Assess the reduction in travel-time residuals, for explosion data and reference event data, when standard models (J-B, ak135) are compared with (a) model-based SSSCs, and (b) kriged SSSCs. [Menke, Schaff]

Throughout year 2: Carry out numerous relocations of reference events, to assess the effectiveness of model-based SSSCs and kriged SSSCs (contrasted with no SSSCs — the situation today); and the merits of using later arrivals. To the extent we achieve significant location improvement, use leave-one-out methods in kriging, for regions where reference events are close together, to allow reference events to be used for an overall validation of our claims of location improvement. [Waldhauser, Schaff, Kim, Richards]

Final Report and scientific paper. [Richards, Menke, Kim, Schaff, Waldhauser]

Current Support and Pending Applications

Supporting Agency	Project Title	Award Amount	Period Covered Award	Man-Month Acad. Sum. Cal.	Location
CURRENT AND PENDING SUPPORT		4/25/2006			PAUL RICHARDS
<u>A. Current Support</u>					
NSF EAR 0510641	Study of Inner Core Motions Using Seismic Waveform Doublets. (Richards, P., PI; w/Schaff, D.)	\$225,000	06/01/05 05/31/07	1/1	LDEO
USGS 06HQGR0106	Calibration of Seismographic Stations for Improved Earthquake Location in 43 States. (Richards, P., PI; Kim, W.Y., Co-PI; w/Menke, W., Waldhauser, F., Schaff, D.)	\$96,424	1/1/06 12/31/06	0.5	LDEO
DS#SLMAQM 02-M-4266	Supplement to DS#SLMAQM 02-M-4266: A Study of Magnitude-Yield Relations for Nuclear Test Sites of the Former Soviet Union. (Richards, P., PI; w/ Khalturin, V., Kim, W.Y.)	\$50,000	09/26/05 09/25/06	0.5	LDEO
<u>B. Pending Support</u>					
USGS 11595	Calibration of Seismographic Stations for Improved Earthquake Location in 43 States. (Richards, P., PI; Kim, W.Y., Co-PI; w/Menke, W., Waldhauser, F., Schaff, D.)	\$97,212	1/1/07 12/31/07	1	LDEO
SMDC W9113M-06-C-0025	Joint U.S.-R.F. Research on Regional Seismic Waves. (Richards, P., PI; Kim, W.Y., Co-PI)	\$932,675	11/01/05 10/31/08	2/2/2	LDEO
<u>C. Outstanding Increments</u>					
<u>D. Proposals Planned to be Submitted in Near Future:</u>					
<u>E. Transfer of Support:</u>					
					NONE
					NONE
					NONE

F. Other Agencies to Which Proposal Has Been/Will be Submitted:

NONE

CURRENT AND PENDING SUPPORT	4/25/2006	WON-YOUNG KIM
-----------------------------	-----------	---------------

A. Current Support

DOE DE-FC52-03NA99514	A Comprehensive Study of Regional Waves from Clustered Underground Nuclear Explosions With the Goals of Source Model Appraisal and Improved Event Identification. (Menke, W., PI; w/Kim, W.Y.)** PI Change	\$335,806	09/30/03 09/29/06	1/0/0	LDEO
USGS 04HQAG0115	The Lamont Cooperative Seismographic Network and the Advanced National Seismic System: Earthquake Hazard Studies in the Northeastern United States. (Kim, W.Y., PI)	\$657,547	07/01/04 01/31/07	2.5/4.0/4.0	LDEO
USGS 06HQGR0106	Calibration of Seismographic Stations for Improved Earthquake Location in 43 States. (Richards, P., PI; Kim, W.Y., Co-PI; w/Menke, W., Waldhauser, F., Schaff, D.)	\$96,424	1/1/06 12/31/06	2	LDEO
USGS 06HQGR0022	ShakeMaps for Earthquakes in the Northeastern United States: Collaborative Research with Columbia University and Boston College (Kim, W.Y., PI)	\$35,000	12/01/05 11/30/06	2.50	LDEO
DS#SLMAQM 02-M-4266	Supplement to DS#SLMAQM 02-M-4266: A Study of Magnitude-Yield Relations for Nuclear Test Sites of the Former Soviet Union. (Richards, P., PI; w/ Khalturin, V., Kim, W.Y.)	\$50,000	09/26/05 09/25/06	1.00	LDEO

B. Pending Support

USGS #11595	Calibration of Seismographic Stations for Improved Earthquake Location in 43 States. (Richards, P., PI; Kim, W.Y., Co-PI; w/Menke, W., Waldhauser, F., Schaff, D.)	\$97,212	01/01/07 12/31/07	1	LDEO
SMDC W9113M-06-C-0025	Joint U.S.-R.F. Research on Regional Seismic Waves. (Richards, P., PI; Kim, W.Y., Co-PI)	\$932,675	11/01/05 10/31/08	4/4/4	LDEO
NSF #11434	Collaborative Research: Uplift and Faulting at the Transition from Subduction to Collision- A field and Modeling Study of the Calabrian Arc. (Steckler, M., PI; Seeber, L., Co-PI; Stark, C., Co-PI; Schaffer, J., Co-PI; Malinverno, A., Co-PI; w/Nedimovic, M., Armbruster, J., Kim, WY.)	\$2,545,489	07/01/06 06/30/10	1/1/1/0.5	LDEO

C. Outstanding Increments

NONE

D. Proposals Planned to be Submitted in Near Future:

NONE

E. Transfer of Support:

NONE

F. Other Agencies to Which Proposal Has Been/Will be Submitted:

NONE

CURRENT AND PENDING SUPPORT	4/22/2005	WILLIAM MENKE
-----------------------------	-----------	---------------

A. Current Support

USGS 06HQGR0106	Calibration of Seismographic Stations for Improved Earthquake Location in 43 States. (Richards, P., PI; Kim, W.Y., Co-PI; w/Menke, W., Waldhauser, F., Schaff, D.)	\$96,424	1/1/06 12/31/06	1	LDEO
-----------------	--	----------	--------------------	---	------

B. Pending Support

USGS #11595	Calibration of Seismographic Stations for Improved Earthquake Location in 43 States. (Richards, P., PI; Kim, W.Y., Co-PI; w/Menke, W., Waldhauser, F., Schaff, D.)	\$97,212	01/01/07 12/31/07	0.5	LDEO
NSF #10717	Collaborative Research: Crustal Accretion and Mantle Processes Along the Subduction-Influenced Eastern Lau Spreading Center. (Webb, S., PI; Menke, W., Co-PI)	\$395,944	01/01/06 12/31/09	.25/.25/.25 .25	LDEO

C. Outstanding Increments

NONE

D. Proposals Planned to be Submitted in Near Future:

NONE

E. Transfer of Support:

NONE

F. Other Agencies to Which Proposal Has Been/Will be Submitted:

NONE

CURRENT AND PENDING SUPPORT		4/25/2006	DAVID SCHAFF		
<u>A. Current Support</u>					
USGS 05HQGR0051	Improving Earthquake Locations in Northern California Using Waveform Based Differential Time Measurements. (Waldhauser, F., PI; Schaff, D., Co-PI)	\$60,000	01/01/05 12/31/06	1	LDEO
*UNIV.SO.CAL.. USC P.O. #76547	A Comprehensive Study of Results from Different Earth- Quake Location Procedures in California. (Waldhauser, F., w/Schaff, D.)	\$40,000	02/1/04 01/31/07	1/.67	LDEO
NNSA DAF#FA8718- 05-C-0022	Improving Magnitude Detection Thresholds Using Multi- Station, Multi-Event, and Multi-Phase Methods. (Schaff, D., PI; Waldhauser, F., Co-PI)	\$181,850	06/01/05 07/31/06	8	LDEO
USGS 06HQGR0106	Calibration of Seismographic Stations for Improved Earthquake Location in 43 States. (Richards, P., PI; Kim, W.Y., Co-PI; w/Menke, W., Waldhauser, F., Schaff, D.)	\$96,424	1/1/06 12/31/06	1	LDEO
USGS 06HQGR0054	Improving Earthquake Locations in Northern California Using Waveform Based Differential Time Measurements. (Waldhauser, F., PI; Schaff, D., Co-PI)	\$65,000	01/01/06 12/31/06	2	LDEO
NSF EAR 0510641	Study of Inner Core Motions Using Seismic Waveform Doublets. (Richards, P., PI; w/Schaff, D.)	\$225,000	06/01/05 05/31/07	2/2	LDEO
USGS 05HQGR0175	Evaluation of Double Difference Algorithms at the NEIC (Waldhauser, F., PI; Schaff, D., Co-PI)	\$60,325	01/01/06 12/31/06	1.5	LDEO
<u>B. Pending Support</u>					
USGS #11595	Calibration of Seismographic Stations for Improved Earthquake Location in 43 States. (Richards, P., PI; Kim, W.Y., Co-PI; w/Menke, W., Waldhauser, F., Schaff, D.)	\$97,212	01/01/07 12/31/07	1	LDEO
USGS #11594	Evaluation of Double-Difference Algorithms at the NEIC (Waldhauser, F., PI)	\$68,501	01/01/07 12/31/07	1.5	LDEO
USGS #11606	Development of a California-wide Three-Dimensional Seismic Wavespeed Model: Collaborative Research with UW-Madison, LDEO/Columbia Univ., Scripps/UC San Diego, and Caltech (Waldhauser, F., PI; w/Schaff, D.)	\$61,454	01/01/07 12/31/07	2	LDEO
<u>C. Outstanding Increments</u>					
NNSA DAF#FA8718- 05-C-0022	Improving Magnitude Detection Thresholds Using Multi- Station, Multi-Event, and Multi-Phase Methods. (Schaff, D., PI; Waldhauser, F., Co-PI)	\$164,219	08/01/06 07/31/07	8	LDEO
<u>D. Proposals Planned to be Submitted in Near Future:</u>					
					NONE
<u>E. Transfer of Support:</u>					
					NONE
<u>F. Other Agencies to Which Proposal Has Been/Will be Submitted:</u>					
					NONE

CURRENT AND PENDING SUPPORT		4/25/06	FELIX WALDHAUSER		
<u>A. Current Support</u>					
USGS 05HQGR0051	Improving Earthquake Locations in Northern California Using Waveform Based Differential Time Measurements. (Waldhauser, F., PI; Schaff, D., Co-PI)	\$60,000	01/01/05 12/31/06	3.5	LDEO
*UNIV.SO.CALIF.. USC P.O. #76547	A Comprehensive Study of Results from Different Earthquake Location Procedures in California. (Waldhauser, F., w/Schaff, D.)	\$40,000	0'2/01/04 01/31/05	1/1	LDEO
NNSA DAF #FA8718-05-C-0022	Improving Magnitude Detection Thresholds Using Multi- Station, Multi-Event, and Multi-Phase Methods. (Schaff, D., PI; Waldhauser, F., Co-PI)	\$181,850	06/01/05 07/31/06	5	LDEO
NSF OCE 03-27283	Seismic Monitoring of the 9N East Pacific Rise RIDGE2000 Integrated Studies Site. (Tolstoy, M., PI; Waldhauser, F., Co-PI)	\$335,613	09/01/03 08/31/06	0/2/2	LDEO

USGS 05HQGR0175	Evaluation of Double Difference Algorithms at the NEIC (Waldhauser, F., PI; Schaff, D., Co-PI)	\$60,325	01/01/06 12/31/06	1.5	LDEO
USGS 06HQGR0106	Calibration of Seismographic Stations for Improved Earthquake Location in 43 States. (Richards, P., PI; Kim, W.Y., Co-PI; w/Menke, W., Waldhauser, F., Schaff, D.)	\$96,424	1/1/06 12/31/06	0.5	LDEO
USGS 06HQGR0054	Improving Earthquake Locations in Northern California Using Waveform Based Differential Time Measurements. (Waldhauser, F., PI; Schaff, D., Co-PI)	\$65,000	01/01/06 12/31/06	4	LDEO
<u>B. Pending Support</u>					
USGS #11595	Calibration of Seismographic Stations for Improved Earthquake Location in 43 States. (Richards, P., PI; Kim, W.Y., Co-PI; w/Menke, W., Waldhauser, F., Schaff, D.)	\$97,212	1/1/07 12/31/07	1	LDEO
USGS #11594	Evaluation of Double-Difference Algorithms at the NEIC (Waldhauser, F., PI; Schaff, D., Co-PI)	\$68,501	01/01/07 12/31/07	3	LDEO
USGS #11606	Development of a California-wide Three-Dimensional Seismic Wavespeed Model: Collaborative Research with UW-Madison, LDEO/Columbia Univ., Scripps/UC San Diego, and Caltech (Waldhauser, F., PI; w/Schaff, D.)	\$61,454	01/01/07 12/31/07	2.25	LDEO
NSF # 11442	Collaborative Research: High-Precision Teleseismic Relocation and Tomography for the M9 and M 8.7 Sumatra Great Earth quake Sequences. (Waldhauser, F., PI)	\$126,566	07/01/06 06/30/08	3	LDEO
<u>C. Outstanding Increments</u>					
NSF OCE 03- 27283	YEAR 4 : OCE 03-27283: Seismic Monitoring of the 9N East Pacific Rise RIDGE2000 Integrated Studies Site. (Tolstoy, M., PI; Waldhauser, F., Co-PI)	\$146,043	9/1/2006 08/31/07	2	LDEO
NNSA DAF#FA8718- 05-C-0022	Improving Magnitude Detection Thresholds Using Multi- Station, Multi-Event, and Multi-Phase Methods. (Schaff, D., PI; Waldhauser, F., Co-PI)	\$164,219	08/01/06 07/31/07	5	LDEO
<u>D. Proposals Planned to be Submitted in Near Future:</u>					NONE
<u>E. Transfer of Support:</u>					NONE
<u>F. Other Agencies to Which Proposal Has Been/Will be Submitted:</u>					NONE

CONTINUATION PROJECTS

USGS 4HQAG0115	The Lamont Cooperative Seismographic Network and the Advanced National Seismic System: Earthquake Hazard Studies in the North-Eastern United States. (Kim, W.Y., PI)	\$657,547	07/01/04 01/31/07	2.5/4/4	LDEO
USGS 06HQGR0022	ShakeMaps for Earthquakes in the Northeastern United States: Collaborative Research with Columbia University And Boston College. (Kim, W.Y., PI)	\$35,000	12/01/05 11/30/06	2.5	LDEO
USGS 05HQGR0051	Improving Earthquake Locations in Northern California Using Waveform Based Differential Time Measurements. (Waldhauser, F., PI; Schaff, D., Co-PI)	\$60,000	01/01/05 12/31/06	3.5	LDEO
USGS 06HQGR0106	Calibration of Seismographic Stations for Improved Earthquake Location in 43 States. (Richards, P., PI; Kim, W.Y., Co-PI; w/Menke, W., Waldhauser, F., Schaff, D.)	\$96,424	01/01/06 12/31/06	0.5	LDEO
USGS 05HQGR0054	Improving Earthquake Locations in Northern California Using Waveform Based Differential Time Measurements. (Waldhauser, F., PI; Schaff, D., Co-PI)	\$65,000	01/01/06 12/31/06	4	LDEO